


**RADIO MANUAL
CALLING
MEN AT WAR
RADIO OPERATORS AND
CIVILIAN RADIO ENGINEERS**

**A BROADCAST OF
USEFUL  DATA**

**TUNE IN FOR
FORMULAS, CODES, DATA,
LAWS, FACTS, TABLES,
CHARTS, ETC.**

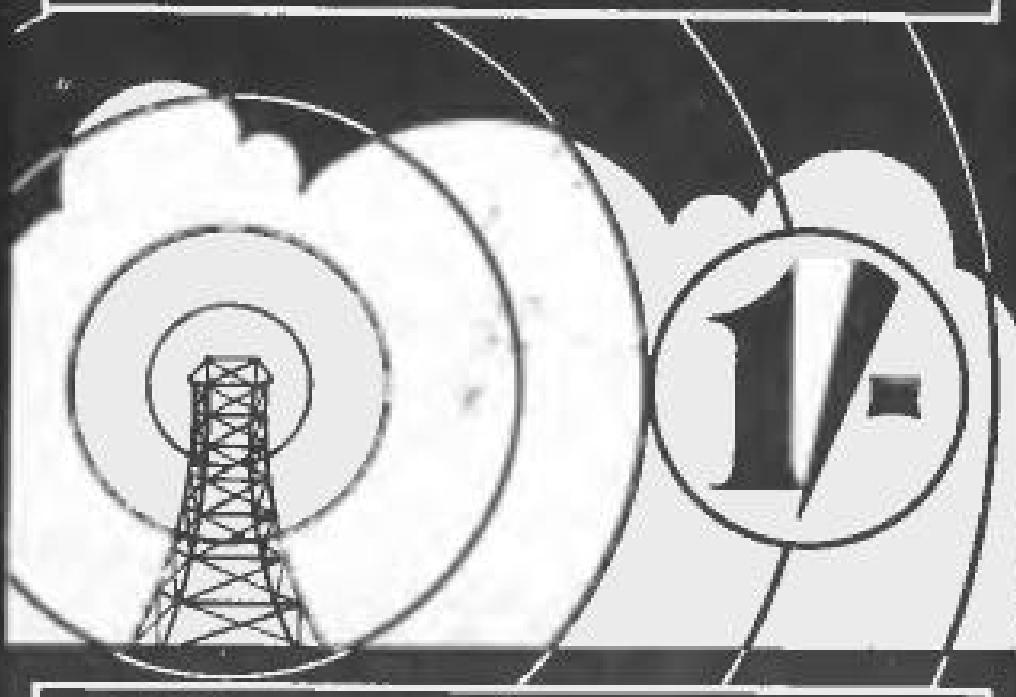


BERNARDS, 77, THE GRAMPIANS, WESTERN GATE, LONDON W.6.

BRITISH COLOUR CODES

Resistances.

The colour of the body represents the first figure of the resistance value, and the colour of the tip or end band the second figure. The colour of the spot on the centre band denotes the number of cyphers that follow the first two figures.

Colour	Figure	Colour	Figure
Black	0	Green	5
Brown	1	Blue	6
Red	2	Violet	7
Orange	3	Grey	8
Yellow	4	White	9

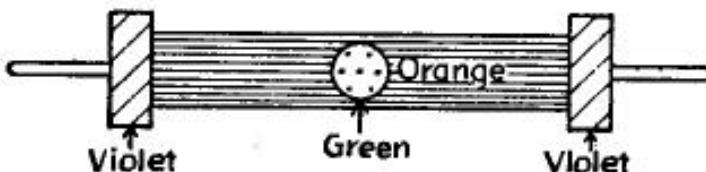

Example:-Orange body, Violet Tip and Green spot
= 3,700,000 ohms resistance

WANDER PLUGS

<u>Value</u>	<u>Colour</u>
Highest + H.T.	Red
2 nd highest + H.T.	Yellow
3 rd highest + H.T.	Green
4 th highest + H.T.	Blue
L.T. Positive	Pink
Negative(L.T.-,H.T.-,G.B.+)	Black
Highest G.B.-	Brown
2 nd highest G.B.-	Grey
3 rd highest G.B.-	White
Any additional battery lead is Violet, and any centre tap is white.	

FUSES

<u>Value</u>	<u>Colour</u>	<u>Value</u>	<u>Colour</u>
60 mA	Black	1 Amp	Dark Blue
100 mA	Grey	1.5 Amp	Light Blue
150 mA	Red	2 Amp	Purple
250 mA	Brown	3 Amp	White
500 mA	Yellow	5 Amp	Black&White
750 mA	Green		

FIXED CONDENSER LEADS

<u>Value</u>	<u>Colour</u>
Highest Capacity +'	Red
2nd highest Capacity +	Yellow
3rd " " +	Green
4th " " +	Blue
5th " " +	Violet
Principal Negative Lead	Black
2nd Negative "	Brown
3rd " "	Grey
Centre lead of Voltage doubler Condensers	White

When 2 capacities are of the same value, the one of the higher voltage rating has the higher colour in the table.

Common Positive junctions are marked	+
" Negative "	-
Series connections are marked	±
Unconnected sections are marked	&

Examples:—

8+8-Two $8\mu F$ condensers with common positive lead
 8-8- " " " negative
 8±8-A series voltage doubler connection
 8&8-Two isolated $8\mu F$ condensers.

MAINS TRANSFORMER LEADS

<u>Primary Value</u>	<u>Colour</u>
10 volt tapping	Black and Green
210 " "	Black and Yellow
230 " "	Black and Red
250 " "	Black and Brown
Zero "	Black

<u>Secondaries Value</u>	<u>Colour</u>
High tension ends	Red
" centre tap	Red and Yellow
Rectifier heater ends	Green
" centre tap	Green and Yellow
Valve heater ends	Brown
" centre tap	Brown and Yellow
Additional L.T winding ends	Blue
" centre tap	Blue and Yellow
Earthing Lead	Bare Wire

FIXED CONDENSERS

COLOUR CODE FOR CAPACITY IN mmf

<u>First Dot</u>	<u>Second Dot</u>	<u>Third Dot</u>
Black - 0	Black - 0	
Brown - 1	Brown - 1	Brown - 0
Red - 2	Red - 2	Red - 00
Orange - 3	Orange - 3	Orange - 000
Yellow - 4	Yellow - 4	Yellow - 0000
Green - 5	Green - 5	Green - 00000
Blue - 6	Blue - 6	Blue - 000000
Purple - 7	Purple - 7	Purple - 0000000
Grey - 8	Grey - 8	Grey - 00000000
White - 9	White - 9	White - 000000000
Example :- 1 st dot Green, 2 nd dot Red, and 3 rd dot Brown = 520mmf capacity.		

WAVELENGTH OF A TUNED CIRCUIT.

$\lambda = 1884 \cdot 96 \sqrt{LC}$ where L = inductance in microhenries, and C = capacity in microfarads.

FREQUENCY OF A TUNED CIRCUIT.

$f = \frac{10^6}{2\pi\sqrt{LC}}$ where f = frequency in cycles per second and, h and C have values as shown in the previous formula.

INDUCTANCE OF A COIL

$L = \pi^2 d^2 n^2 TK$ where L = inductance in microhenries, d = diameter of coil in cms, n = number of turn per cm, T = length of coil in cms, and K = a constant depending on ratio of diameter to length of coil.

Value for K given below.

$\frac{d}{T}$	K	$\frac{d}{T}$	K	$\frac{d}{T}$	K
.00	1.00	.8	.735	4.0	.365
.1	.959	.9	.711	5.0	.320
.2	.920	1.0	.688	6.0	.285
.3	.884	1.5	.595	7.0	.258
.4	.850	2.0	.526	8.0	.237
.5	.818	2.5	.472	9.0	.218
.6	.788	3.0	.429	10.0	.203
.7	.761				

VARIABLE CONDENSER CAPACITY

$C = \frac{0.885 \cdot NS}{10^6 d}$ Where N=number of moving vanes
 S-area of one moving vane in
 sq cms, and d-thickness of air
 gap between fixed and moving vanes in cms.

REACTANCE OF A COIL

$R = 2\pi f h$ where f=frequency in c.p.s.
 and h=inductance in henrys.

REACTANCE OF A CONDENSER

$R = \frac{1}{2\pi f C}$ where f=frequency in c.p.s.
 and C=capacity in farads.

WAVELENGTH

$W = 1884 \sqrt{LC}$ where W=metres, L=
 inductance in microhenries, C=capacity
 in microfarads. Also $W \times f = 3 \times 10^8$

LOW FREQUENCY AMPLIFICATION

The voltage stage gain of a L.F. transformer coupled-amplifier is approximately as follows

$$A = \mu \frac{N_2}{N_1} \times \frac{P}{\sqrt{R^2 + R_s^2}}$$

Where μ =voltage gain of valve, N_2 =number of secondary turns of transformer, N_1 =number of primary turns of transformer, R =A.C. resistance of valve, and P =reactance of primary coil in ohms.

RESISTANCE COUPLED. L.F. AMPLIFICATION

Voltage stage gain of a resistance coupled L.F. amplifier is as follows.

$A = \mu \times \frac{R}{R+T}$ where μ =amplification factor of valve, R =external coupling resistance in Ohms, and T =A.C. resistance (impedance) of valve.

JELLY ELECTROLYTE FOR ACCUMULATORS

A fast setting mixture which jellifies in 10 minutes is prepared as follows:-

1 part pure sodium silicate of specific gravity 1.200 mixed with 3 parts of cold sulphuric acid of 1.400 specific gravity.

EUREKA RESISTANCE WIRE

S.W.G.	O.D. in INCHES	TURNS per INCH D.S.C.	LENGTH per Ohm in inches	Ohms per yard.	Wt per 1000yds in lbs
16	.064	14.7	173.8	.21	37.2
18	.048	19.6	96.8	.37	20.93
20	.036	25.6	54.4	.66	11.77
22	.028	32.2	32.9	1.10	7.12
24	.022	40.0	20.3	1.77	4.392
26	.018	48.8	13.7	2.64	2.942
28	.014	57.8	9.2	3.91	1.989
30	.012	67	6.5	5.57	1.399
32	.010	75	4.9	7.35	1.059
34	.009	85	3.6	10.12	.768
36	.007	90	2.4	14.84	.525
38	.006	11.8	1.5	23.80	.327

BIAS RESISTANCE

Grid Leak Bias

$$V_g = I_g \times R_g \quad R_g = \frac{V_g}{I_g} \quad R_g = \frac{V_g - E}{I_g}$$

Where R_g = grid leak resistance, V_g = bias voltage,
 I_g = d.c. grid current, and E = voltage of series battery

Cathode Bias

$R_g = \frac{V_g}{A_g + A_s + A_a}$ where V_g & R_g are as
above, and A_g , A_s , and
 A_a are grid, screen, and anode currents respectively.

METER CONVERSIONS

To Extend Range of a Milliammeter

$$\text{Shunt resistance } R_s = \frac{R_M}{n-1}$$

To Extend Range of a Voltmeter

$$\text{Series resistance } R_T = R_M \times (n-1)$$

To use a Milliammeter as a Voltmeter

$$\text{Series resistance } R_T = \frac{E}{I_M} - R_M$$

Where n = factor by which it is desired to multiply the range of meter, R_M = resistance of meter, E = required voltage reading, and I_M = reading of current meter at full scale deflection.

SPECIFIC RESISTANCE

$$R = \frac{TP}{A}$$

Where T = specific resistance of a centimetre cube, P = length of wire in cm, A = cross sectional area of wire in sq cms, and R = the resistance of the wire at 0°C . If T is in Microhms R is in microhms; if T is in ohms, R is in ohms.

SPECIFIC RESISTANCES OF MATERIALS.

Material	Resistance in Microhms per cm cube.	Material	Resistance in Microhms per cm cube
Silver	1.47	Mercury	94.07
Copper	1.588	Manganin	46.7
Aluminium	2.665	Eureka	51.0
Iron	9.07	Nichrome	95.0
Platinum	10.92	Water	7×10^{16}
Tin	13.05	Mica	5×10^{22}
Lead	20.4	Glass	5×10^{24}

1 micrahm = .000001 of an ohm

DECIBELS AND POWER RATIO

The Decibel is the comparative unit of sound strength. 1 decibel = the sound that can just be discerned by the human ear.

DECIBELS CONVERSION TABLE

DECIBELS	POWER RATIO	DECIBELS	POWER RATIO
1	1.25	-1	.8
2	1.6	-2	.625
3	2.0	-3	.5
4	2.5	-4	.4
5	3.2	-5	.3125
6	4.0	-6	.25
7	5.0	-7	.2
8	6.0	-8	.166
9	8.0	-9	.125
10	10.0	-10	.1
20	100.0	-20	.01
30	1000	-30	.001
40	10000	-40	.0001
50	100000	-50	.00001
60	1000000	-60	.000001

WAVELENGTH AND FREQUENCY TABLES.

To use these tables which give inductance capacity values for Radio Frequencies the following examples are shown : -

1. Given a tuned circuit total capacity .0005 mfd and inductance 245 microhenries, what is the natural wavelength and frequency. Answer - the L.C. constant is $.0005 \times 245 = .1225$, therefore wavelength is 660 metres and frequency 454.5 Kilocycles.

2. What inductance is needed to tune a .0005 mfd. condenser to 1900 metres. Answer - L.C. for 1900 metres = 1.016, therefore inductance is 1.016 divided by .0005 which equals 2.032 microhenries.

3. A circuit with a natural frequency of 1250 Kc is required, the tuning coil inductance being 81 microhenries. What capacity should be connected across the coil.


Answer L.C. for 1250 Kc = .01622 hence capacity is $.01622 \div 81$ which equals .0002 microfarads.

Wave Length	Frequency Kilocycles	L.C.	Wave Length	frequency Kilocycles	L.C.
4400	8220	2400	1600	1200	10
4620	8400	2600	1800	1400	15
5000	0000	0000	0000	0000	20
5400	0000	0000	0000	0000	30
5800	0000	0000	0000	0000	40
6200	0000	0000	0000	0000	50
6600	0000	0000	0000	0000	60
7000	0000	0000	0000	0000	70
7400	0000	0000	0000	0000	80
7800	0000	0000	0000	0000	90
8200	0000	0000	0000	0000	100
8600	0000	0000	0000	0000	110
9000	0000	0000	0000	0000	120
9400	0000	0000	0000	0000	130
9800	0000	0000	0000	0000	140
10200	0000	0000	0000	0000	150
10600	0000	0000	0000	0000	160
11000	0000	0000	0000	0000	170
11400	0000	0000	0000	0000	180
11800	0000	0000	0000	0000	190
12200	0000	0000	0000	0000	200
12600	0000	0000	0000	0000	210
13000	0000	0000	0000	0000	220
13400	0000	0000	0000	0000	230
13800	0000	0000	0000	0000	240
14200	0000	0000	0000	0000	250
14600	0000	0000	0000	0000	260
15000	0000	0000	0000	0000	270
15400	0000	0000	0000	0000	280
15800	0000	0000	0000	0000	290
16200	0000	0000	0000	0000	300
16600	0000	0000	0000	0000	310
17000	0000	0000	0000	0000	320
17400	0000	0000	0000	0000	330
17800	0000	0000	0000	0000	340
18200	0000	0000	0000	0000	350
18600	0000	0000	0000	0000	360
19000	0000	0000	0000	0000	370
19400	0000	0000	0000	0000	380
19800	0000	0000	0000	0000	390
20200	0000	0000	0000	0000	400
20600	0000	0000	0000	0000	410
21000	0000	0000	0000	0000	420
21400	0000	0000	0000	0000	430
21800	0000	0000	0000	0000	440
22200	0000	0000	0000	0000	450
22600	0000	0000	0000	0000	460
23000	0000	0000	0000	0000	470
23400	0000	0000	0000	0000	480
23800	0000	0000	0000	0000	490
24200	0000	0000	0000	0000	500
24600	0000	0000	0000	0000	510
25000	0000	0000	0000	0000	520
25400	0000	0000	0000	0000	530
25800	0000	0000	0000	0000	540
26200	0000	0000	0000	0000	550
26600	0000	0000	0000	0000	560
27000	0000	0000	0000	0000	570
27400	0000	0000	0000	0000	580
27800	0000	0000	0000	0000	590
28200	0000	0000	0000	0000	600
28600	0000	0000	0000	0000	610
29000	0000	0000	0000	0000	620
29400	0000	0000	0000	0000	630
29800	0000	0000	0000	0000	640
30200	0000	0000	0000	0000	650
30600	0000	0000	0000	0000	660
31000	0000	0000	0000	0000	670
31400	0000	0000	0000	0000	680
31800	0000	0000	0000	0000	690
32200	0000	0000	0000	0000	700
32600	0000	0000	0000	0000	710
33000	0000	0000	0000	0000	720
33400	0000	0000	0000	0000	730
33800	0000	0000	0000	0000	740
34200	0000	0000	0000	0000	750
34600	0000	0000	0000	0000	760
35000	0000	0000	0000	0000	770
35400	0000	0000	0000	0000	780
35800	0000	0000	0000	0000	790
36200	0000	0000	0000	0000	800
36600	0000	0000	0000	0000	810
37000	0000	0000	0000	0000	820
37400	0000	0000	0000	0000	830
37800	0000	0000	0000	0000	840
38200	0000	0000	0000	0000	850
38600	0000	0000	0000	0000	860
39000	0000	0000	0000	0000	870
39400	0000	0000	0000	0000	880
39800	0000	0000	0000	0000	890
40200	0000	0000	0000	0000	900
40600	0000	0000	0000	0000	910
41000	0000	0000	0000	0000	920
41400	0000	0000	0000	0000	930
41800	0000	0000	0000	0000	940
42200	0000	0000	0000	0000	950
42600	0000	0000	0000	0000	960
43000	0000	0000	0000	0000	970
43400	0000	0000	0000	0000	980
43800	0000	0000	0000	0000	990
44200	0000	0000	0000	0000	1000

OHMS LAW

<u>Amperes</u>	= Volts ÷ Resistance
"	= Watts ÷ Volts
"	= $\sqrt{\text{Watts} \div \text{Resistance}}$
<u>Volts</u>	= Resistance X Amperes
"	= Watts ÷ Amperes
"	= $\sqrt{\text{Watts} \times \text{Resistance}}$
<u>Watts</u>	= (Amperes) ² X Resistance
"	= (Volts) ² ÷ Resistance
"	= Amperes X Volts
<u>Resistance</u>	= Volts ÷ Amperes
"	= (Volts) ² ÷ Watts
"	= Watts ÷ (Amperes) ²

RESISTANCES IN PARALLEL



$$R = \frac{1}{R_1} + \frac{1}{R_2} + \frac{1}{R_3} + \frac{1}{R_4} + \text{ETC.}$$

2 Parallel Resistances $R = (R_1 \times R_2) \div (R_1 + R_2)$


3 Parallel Resistances

$$R = \frac{R_1 \times R_2 \times R_3}{(R_1 \times R_2) + (R_2 \times R_3) + (R_3 \times R_1)}$$

4 Parallel Resistances


$$R = \frac{R_1 \times R_2 \times R_3 \times R_4}{(R_1 \times R_2 \times R_3) + (R_2 \times R_3 \times R_4) + (R_3 \times R_4 \times R_1) + (R_4 \times R_1 \times R_2)}$$

RESISTANCES IN SERIES.

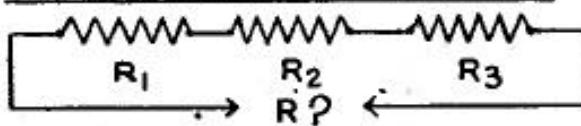


$$R = R_1 + R_2 + R_3 + \text{ETC.}$$


RESISTANCE IN SERIES-PARALLEL

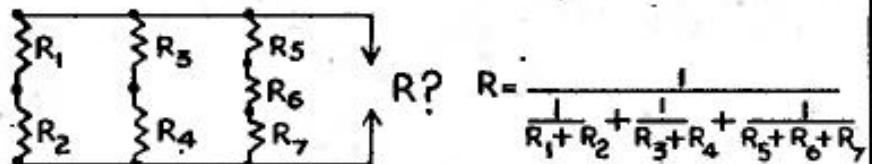


CONDENSERS IN PARALLEL




CONDENSERS IN SERIES



CONDENSERS IN SERIES-PARALLEL

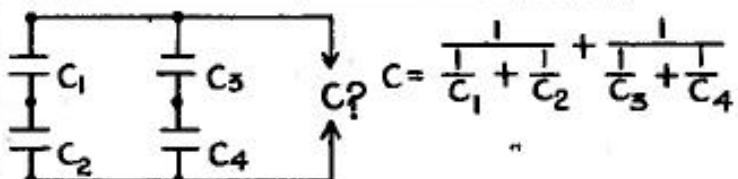


INDUCTANCES IN SERIES



Where there is no mutual inductance

$$L = L_1 + L_2 + L_3 + L_4 + \text{ETC.}$$

INDUCTANCES IN PARALLEL



$$\frac{1}{L} = \frac{1}{L_1} + \frac{1}{L_2} + \frac{1}{L_3} + \frac{1}{L_4} + \text{ETC.}$$

COPPER WIRE TABLES

S.W.G.	DIA IN INCHES	RESISTANCE IN OHMSS PER YP	RESISTANCE IN OHMSS PER LB.	LBS PER OHM	WEIGHT IN LBS PER 1000 YDS.	YARDS PER LB.	TURNS PER INCH				
							ENAMEL COVERED	S.S.C.	D.S.C.	S.C.C.	D.C.C.
28	.0148	1398	70.12	.0141	1.980	503.0	61.4	60.4	56.2	48.1	40.2
29	.0136	1655	98.65	.0101	1.680	596.6	66.2	65.2	60.2	51.0	42.4
30	.0124	1991	142.75	.0069	1.396	716.6	73.3	70.0	67.1	54.4	44.7
31	.0116	2275	185.80	.0054	1.222	820.0	77.8	76.3	70.9	56.8	46.3
32	.0108	2625	248.20	.0040	1.059	943.3	83.0	81.3	75.2	63.3	50.5
33	.0100	3061	337.50	.0029	.9081	1100	88.9	87.0	80.0	66.7	52.6
34	.0092	3617	471.00	.0023	.7686	1300	98.0	93.4	85.5	70.4	54.9
35	.0084	4338	676.50	.0014	.6408	1556	106	101	91.8	80.6	61.0
36	.0076	5300	1009	.00098	.5254	1903	116	110	102	86.2	64.1
37	.0068	6620	1574	.00064	.4199	2380	128	120	110	92.6	67.6
38	.0060	8503	2598	.00038	.3269	3056	143	133	121	100	71.4
39	.0052	1.132	4645	.00022	.2456	4066	168	149	134	109	75.8
40	.0048	1.328	6360	.00016	.2092	4766	180	159	142		
41	.0044	1.581	9020	.00011	.1758	5700	194	169	150		
42	.0040	1.913	13150	.00008	.1453	6866	211	191	167		
43	.0036	2.362	20120	.00005	.1177	7560	230	206	179		
44	.0032	2.989	32210	.00003	.0929	10766	253	225	192		
45	.0028	3.904	54980	.00002	.0712	14066	282	247	208		

COPPER WIRE TABLES

S.W.G.	DIA IN INCHES	RESISTANCE IN OHMS PER YD.	RESISTANCE IN OHMS PER LB.	LBS PER OHM	WEIGHT IN LBS PER 1000 YDS.	YARDS PER LB.	TURNS PER INCH			
							ENAMELED COVERED.	S.S.C.	D.S.C.	S.C.C.
10	.128	.001868	.0120	83.30	148.8	6.67	7.64	7.55	7.35	7.04
11	.116	.002275	.0200	50.00	122.2	8.16	8.41	8.30	8.06	7.69
12	.104	.002831	.0280	35.70	98.22	10.23	9.35	9.22	8.93	8.48
13	.092	.003617	.0550	18.10	76.86	13.00	10.5	10.4	10.00	9.43
14	.080	.004784	.0820	12.20	58.12	17.16	12.1	11.8	11.4	10.6
15	.072	.005904	.1400	7.14	47.08	21.23	13.3	13.1	12.5	11.6
16	.064	.007478	.2021	4.95	37.2	26.86	15.0	14.9	14.6	14.1
17	.056	.009762	.3423	2.38	28.48	35.00	17.1	16.9	16.5	15.9
18	.048	.01328	.6351	1.56	20.92	47.66	19.8	20.0	19.4	18.5
19	.040	.01913	.1.315	.757	14.53	68.66	23.7	23.0	21.7	20.0
20	.036	.02362	.2.012	.497	11.77	85.0	26.1	29.4	25.3	23.8
21	.032	.02990	.3.221	.309	9.299	107.6	29.4	28.4	28.2	26.3
22	.028	.03905	.5.498	.181	7.120	140.6	33.3	33.3	31.8	29.4
23	.024	.05313	.10.14	.098	5.231	191.6	38.8	38.5	36.4	33.3
24	.022	.06324	.14.38	.069	4.395	228.3	42.1	42.1	40.0	35.7
25	.020	.07653	.21.08	.0471	3.632	46.0	46.0	43.5	38.5	33.3
26	.018	.09448	.32.21	.0309	2.942	275.3	50.6	47.6	41.7	35.7
27	.0164	.11138	.46.55	.0215	2.442	410.0	55.1	51.6	44.6	37.9

MORSE AND INTERNATIONAL TELEGRAPH CODE SYMBOLS

LETTER	CODE SYMBOL	LETTER	CODE SYMBOL
A	•—	N	—•
B	—...—	O	———
C	—.—.	P	—.—.
D	—..—	Q	——·—
E	.	R	·—·—
F	·—.—.	S	···
G	—.—.	T	—
H	····	U	·—·—
I	·..	V	···—
J	·———	W	·——
K	—·—	X	—·—·—
L	·—..—	Y	—·—·—
M	——	Z	——·—

NUMBERS

NUMBER	CODE	NUMBER	CODE
1	·———	6	·—·—·—
2	·—·—	7	—·—·—
3	·—·—·—	8	—·—·—·—
4	·—·—·—	9	—·—·—·—
5	·—·—·—·—	0	—·—·—·—·—

PUNCTUATION MARKS ETC.

PERIOD	· · · ·
COMMA	—·—·—
INTERROGATION	·—·—·—
QUOTATION MARKS	·—·—·—
EXCLAMATION	—·—·—
COLON	—·—·—·—
SEMICOLON	—·—·—·—
PARENTHESIS	—·—·—·—
FRACTION BAR	—·—·—
WAIT SIGN	·—·—·—
DOUBLE DASH (BREAK)	—·—·—
ERROR (ERASE) SIGN	······
END OF MESSAGE	—·—·—·—
END OF TRANSMISSION	······
INTERNATIONAL DISTRESS SIGNAL (S.O.S.)	—·—·—·—·—

THEORETICAL RADIO SYMBOLS

SAFE CURRENT CARRYING CAPACITY OF BARE COPPER WIRE

SWG	AMPS	SWG	AMPS	SWG	MILLIAMPS
10	35	26	1·0	42	50
12	28	28	.7	44	50
14	19	30	.5	45	25
16	13	32	.4	46	20
18	7	34	.25	47	12
20	4	56	.15	48	8
22	2·5	38	.1	49	5
24	1·5	40	.07	50	3

CAPACITY OF FIXED CONDENSERS.

$$C = \frac{0.885 AP(n-1)}{d}$$

$$\text{Reactance of a condenser} = \frac{1}{2\pi f C}$$

Where :-

C = capacity in farads

A = area of overlap of plates in sq cms.

P = dielectric constant of separating material

n = number of metal plates

d = distance separating plates in cms

f = frequency in cycles per seconds

Dielectric constants of insulating materials commonly used.

Air = 1. Glass = 6·8 to 10. Mica = 5 to 7.

Ebonite = 2·56 to 3·48. Shellac = 2·95 to 3·73.

Fibre = 5·1 to 5·9. India rubber (Para) = 2·34.

Paraffin Wax = 1·92 to 2·47. Vulcanised Rubber = 2·94.

BERNARDS TECHNICAL BOOKS
1/- SERIES

EACH A MINE OF INFORMATION

-
- 1.—Amalgamated Engineering Reference Tables and Data Charts. B.A., B.S.F., B.S.P., B.S.W. Thread Data, Clearance and Tapping drill sizes, solution of triangles, Sheet Metal Gauges, etc., etc.
 - 2.—"Little Marvel" Vegetable Reference Book for all amateur gardeners. What to sow, and when. Pests, Diseases, Fertilisers, etc., etc.
 - 3.—Services Signalling Manual. Semaphore, Morse, Flag Signals, Heliograph, etc., etc.
 - 4.—Radio Manual. Tables, Charts, Facts, Laws, Rules, Diagrams, etc.
 - 5.—Elements of Mathematics. Facts, Rules and Formulae on Arithmetic, Algebra, Trigonometry, Geometry and Calculus.
 - 6.—Electrical Engineers and Electricians Hand Book. Tables, Hints, Data Charts, Wire and Cable sizes, A.C. and D.C. Motors, Lighting, Heating, Power, etc., etc.
-

**IF IN DOUBT simply look
into a "BERNARDS" Pocket Book**