
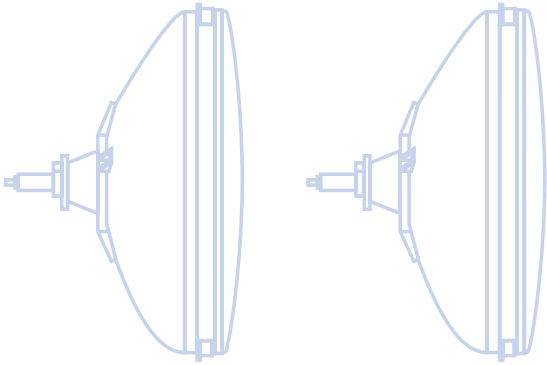












Panasonic

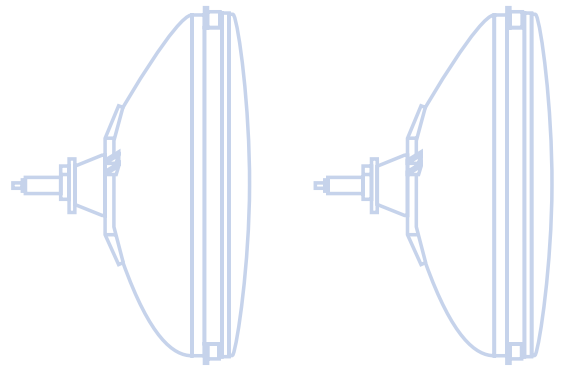

SuperPigment^{Plus}

Colour Picture Tube
W 66 EKU 60X

Product Specification

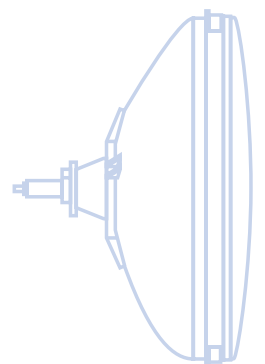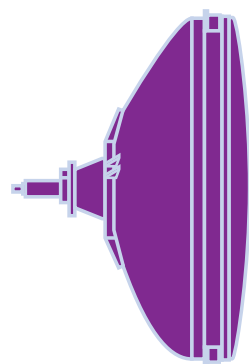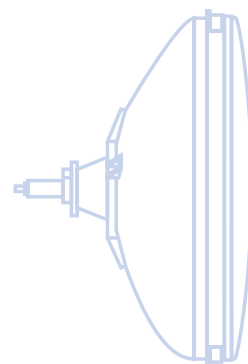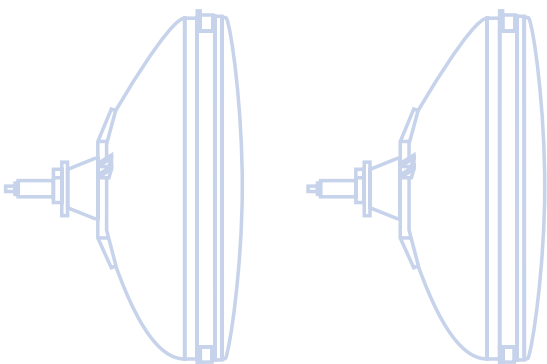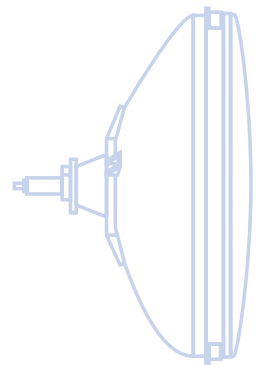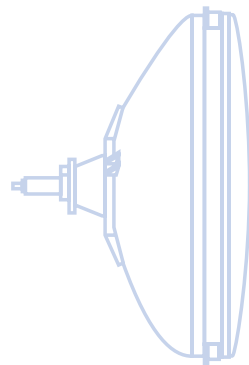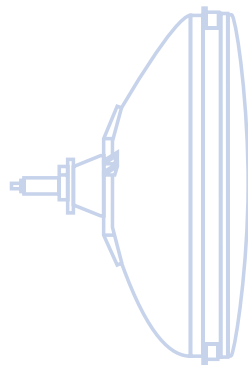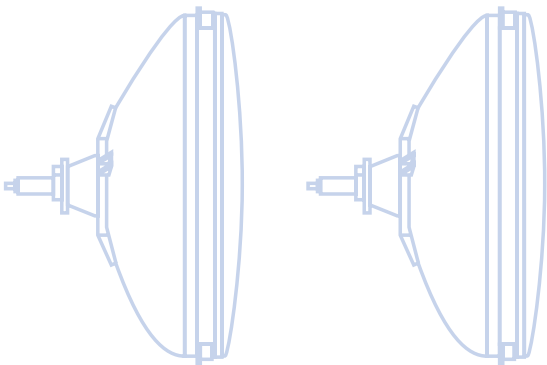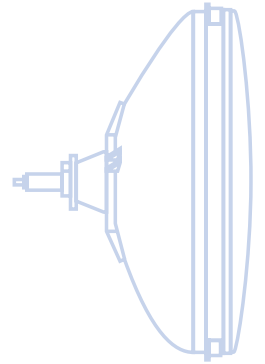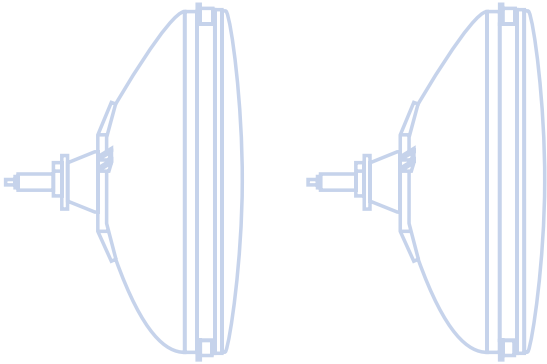

**MATSUSHITA ELECTRONICS
(EUROPE) GmbH**

Fritz-Müller-Strasse 112
D-73730 Esslingen · Germany
P.O. Box 100954
D-73709 Esslingen · Germany

Phone ++49(0)711 / 3104-536
Fax ++49(0)711 / 3104-377
E-mail: Marketing.Sales@Panasonic-CRT.de

The details of this data book refer to the specifications of products, but do not represent a guarantee of characteristics.

Availability and right to change reserved.


For design purposes use only 1:1 drawings

Product specification

Colour Picture Tube

... is a 28" SuperPigment Plus Colour Picture Tube with a glass diagonal of 72 cm for TV use.

The W 66 EKU 60X... is a 16:9 Pure Flat Colour Picture Tube with an SST-Invar Mask.

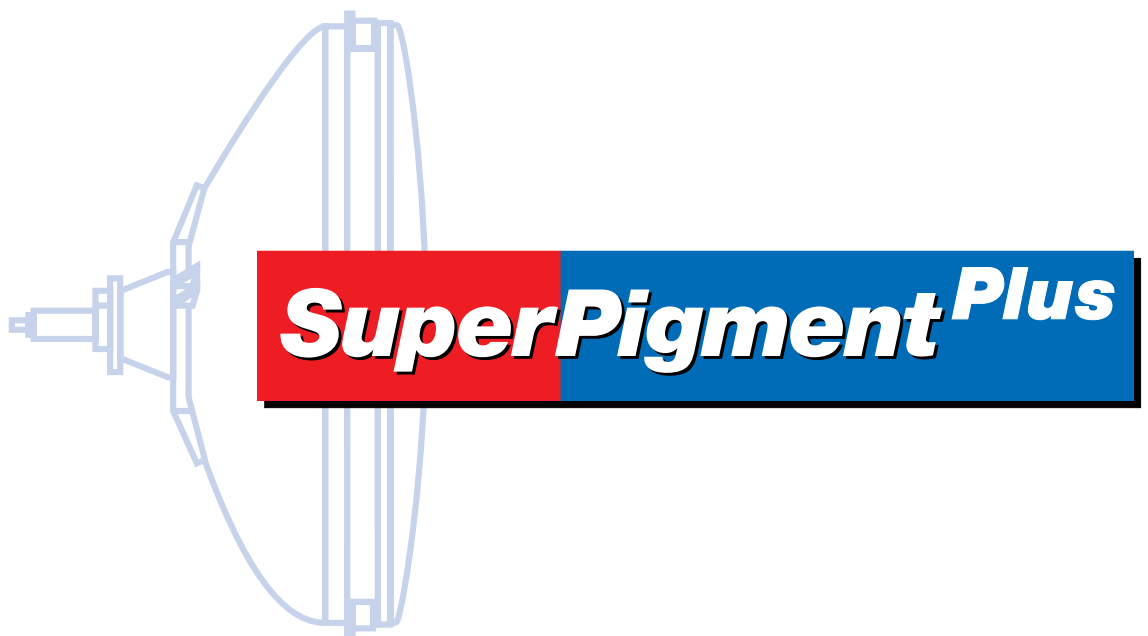

W 66 EKU 60X

1
Contents

Chapter	Title	Page
1	Contents	4
2	List of Figures and Tables	5
3	Short Description	6
4	Typical Operating Conditions	8
5	Circuit Design Values	8
6	Glass- and Screen Data	10
7	Notes for Test and Adjustment	11
8	Mechanical Data and Dimensional Drawings	12
9	Limiting Values	17
10	Screen- and Glass-Blemishes Limits	20
11	Geometry and Convergence Specification	22
12	General Notes	25
12.1	Limit values by IEC Publication	25
12.2	Voltage between Heater and Cathode	25
12.3	Voltages between Cathode and Grids	25
12.4	Screen	25
12.5	Spark Gaps	26
12.6	Degaussing	26
12.7	Implosion Protection	28
12.8	Handling	29
12.9	Cabinet Design	29
12.10	Microphony	29
12.11	Transport	29
12.12	Storage	29
12.13	Type Designation by Pro Electron and Tube Label	29
13	Used Formula Signs	30


2
List of Figures
and Tables

Title	Page
Figure 1	Tube Dimensions, Front View 6
Figure 2	Tube Dimensions, Side View 7
Figure 3	Tube Dimensions, Top View 7
Figure 4	Cut-off Voltage Range 8
Figure 5	Video Drive Characteristics 8
Figure 6	Phosphor and Screen Dimensions 10
Figure 7	Recommended Cathode Voltage 11
Figure 8	Anode Contact 13
Figure 9	Panel Reference Points 13
Figure 10	Overall Dimensions of Tube, Top View 13
Figure 11	Overall Dimensions of Tube, Side View 14
Figure 12	Overall Dimensions of Tube, Front View 14
Figure 13	Detail A, Dimensions of Lug 14
Figure 14	Dimensions of Lug, View B 15
Figure 15	External Coating 15
Figure 16	Implosion Frame (External Coating, Section A - B) 15
Figure 17	Funnel Radial Coordinates 16
Figure 18	Tube Base 17
Figure 19	Tube Base, Section C - D 17
Figure 20	ISO Dose Rate 19
Figure 21	Blemishes, High Contrast 20
Figure 22	Blemishes, Medium Contrast 20
Figure 23	Screen Zones 21
Figure 24	Scratches on the Faceplate 21
Figure 25	Stains on the Faceplate 21
Figure 26	Raster Distortion, Separate 22
Figure 27	Raster Rotation 23
Figure 28	Raster Distortion, Sum 23
Figure 29	Convergence 24
Figure 30	Spark Gaps 26
Figure 31	Degaussing - Reduction of Current per Halfwave 27
Figure 32	Degaussing - Residual Value of Magnetomotive Force 27
Figure 33	Placement of Degaussing Coil, Top View 27
Figure 34	Placement of Degaussing Coil, Side View 28
Figure 35	Degaussing Circuit 28
Figure 36	Tube Label (Example) 29

3
Short description

Useful screen diagonal	66 cm	Heater voltage (stab.)	$U_F = 6,3 V$
Glass diagonal	71,2 cm	Heater current	$I_F = 310 mA$
Deflection angle	102°	Anode voltage with full load	$U_A = 25 - 33 kV$
Neck diameter	29,1 mm	Focusing voltage	25,5 - 29,5 % U_A
Overall length	441 ± 5 mm		
Mass	30,2 kg		
Glass transmission effective	43,5		
<hr/>			
Aspect ratio	16:9		
<hr/>			
Screen	vertical line with black matrix		
	pure flat and square		
<hr/>			
Phosphors	cadmium free green, gold activated,		
	high density pigmented red		
	high density pigmented blue		
<hr/>			
Shadow mask assembly	slotted type of SST		
	temperature compensated		
<hr/>			
Electron gun	in-line, Hi-Bi potential		
	MPF/OLF/ART/DAF		
	external multipole unit		
<hr/>			
Magnetic shield	inner magnetic shield		
<hr/>			
Implosion protection	shrink frame technology		
<hr/>			
Base cap	B12-285		
<hr/>			

Figure 1:
 Tube Dimensions, Front View

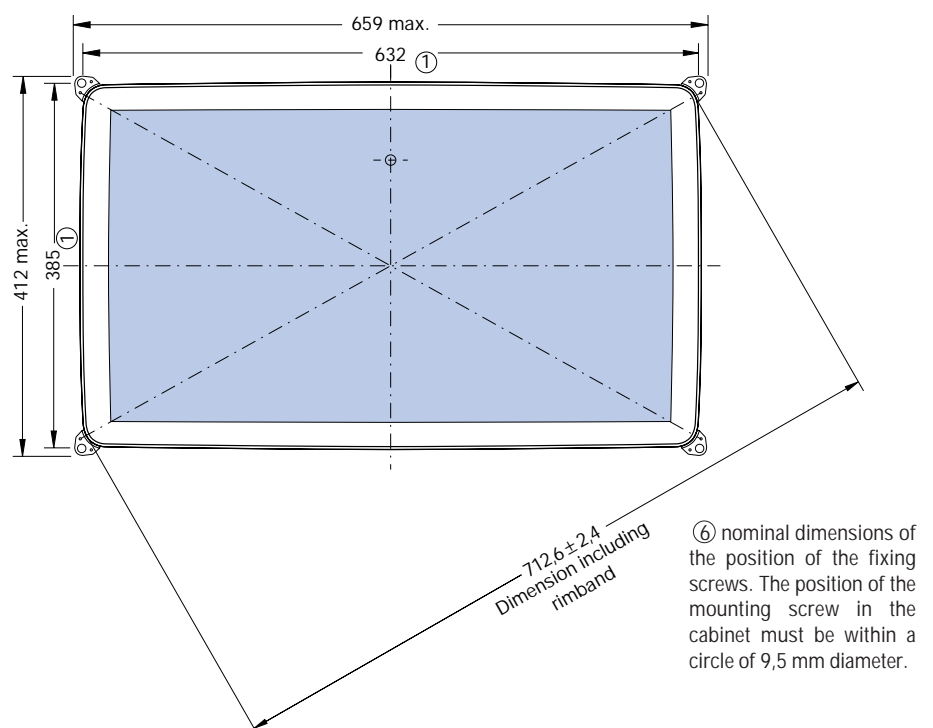

Exposure	northern hemisphere vertical $+35 \pm 20\mu\text{T}$
Scanning-line system	525 and/or 625 scanning-lines
Deflection yoke	* north/south pincushion free, * self converging * 50 or 100 Hz * fully coma corrected
Other features	* soft flash technology * optional SVM coil * Cathode ray tube intrinsically safe up to 29,9 kV according to appendix III Röntgenverordnung (newly issued 8.1.1987).

Figure 2:
 Tube Dimensions, Side View


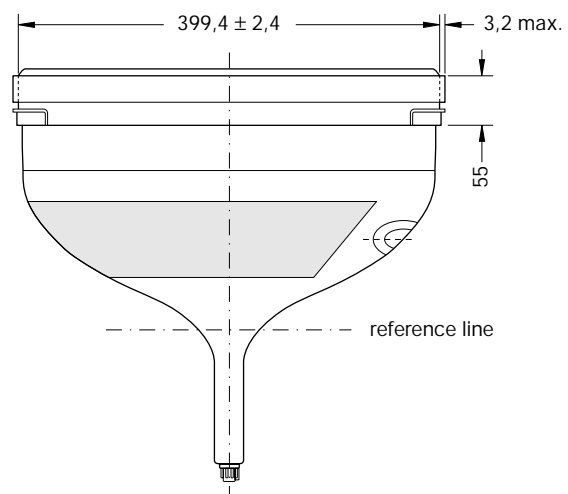


Figure 3:
 Tube Dimensions, Top View


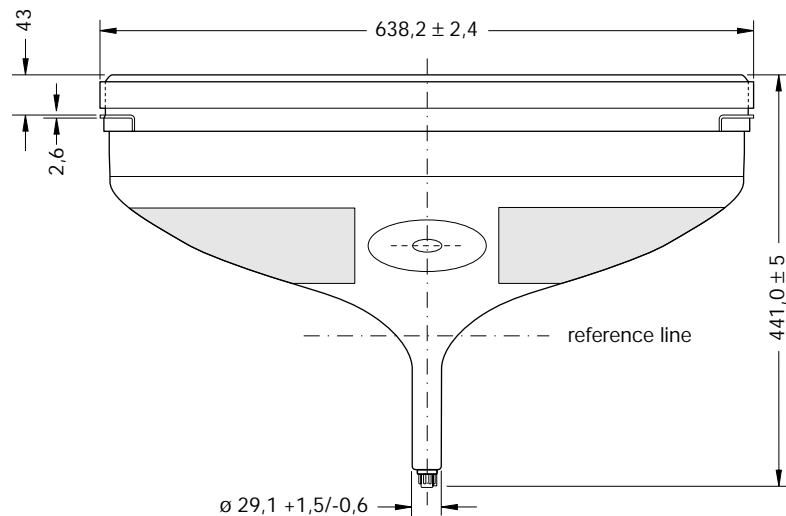


4
Typical Operating Conditions
Voltages are specified with respect to grid 1

Anode voltage	$U_A = 29,5 \text{ kV}$
Focusing voltage	$U_{G3, G5} = 7,52 - 8,70 \text{ kV}$
Cut-off voltage grid 2,4 ($V_{kc} = 170V$)	$U_{G2, G4} = 315 - 670 \text{ V}$
Heater voltage (stab.)	$U_F = 6,3 \text{ V}$
Heater current	$I_F = 310 \text{ mA}$

Figure 4 (left)
Cut-off Voltage Range

Figure 5 (right)
Video Drive Characteristics

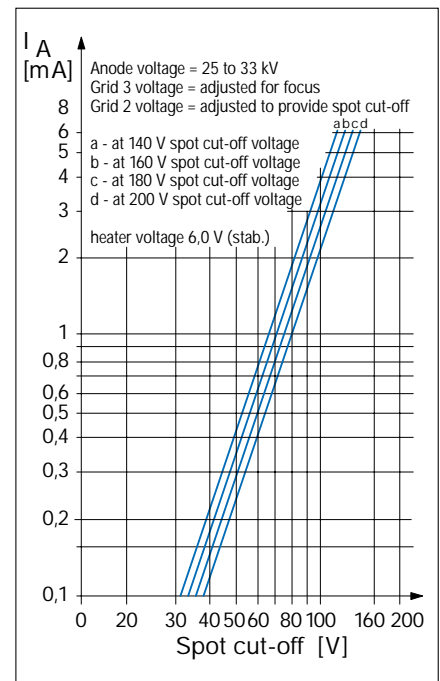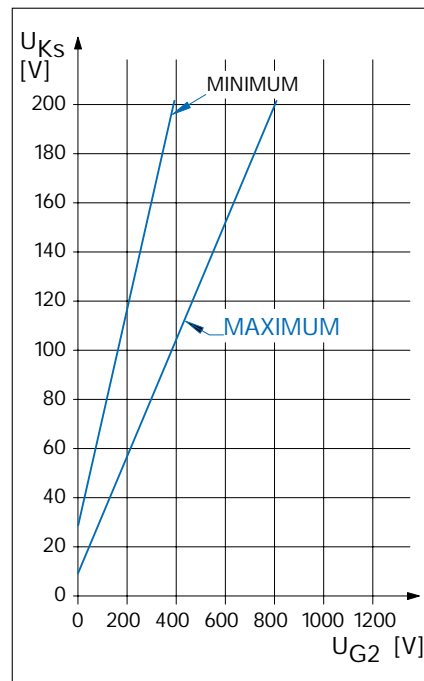

5
Circuit Design Values
Voltages are specified with respect to grid 1

Anode voltage	$U_A = 25 - 33 \text{ kV}$
Grid 3, 5 focus voltage	$U_{G3, G5} = 25,5 - 29,5\% \text{ of } U_A$
Grid 1 reference point	$U_{G1} = 0 \text{ V}$

Cut-off voltage range Figure 4

Grid 2, 4 cut-off voltage	$U_{G2, G4} = 315 - 670 \text{ V}$
Recommended cathode voltage for black level adjustment	$U_K = 170 \text{ V}$

Video drive characteristics Figure 5

Grid 1 to all other electrodes	$C_{G1} = 16 \text{ pF}$
Cathode to all other electrodes	$C_K = 12 \text{ pF}$
Grid 3, 5 to all other electrodes	$C_{G3, G5} = 8 \text{ pF}$
Anode to external conductive coating	$C_{A/M} = 1700 - 2300 \text{ pF}$
Anode to metal rimband	$C_{A/Z} = 300 - 400 \text{ pF}$

Leakage current cathode-heater	$I_{KF \max}$	= 5	μA
Test conditions	U_A	= 0	V
grid 1, 2 and 3 has to be connected to the cathode of the gun in test	U_{KF}	= 275	V

Leakage currents, flashovers, stray emission			
Test conditions	U_K	= 250	V
for these three items	U_A	= 33	kV
	$U_{G2, G4}$	= 620	V

Leakage currents			
grid 3	$I_{G3, G5 \max.}$	= ± 5	μA
grid 2	$I_{G2, G4 \max.}$	= ± 5	μA
grid 1	$I_{G1 \max.}$	= ± 5	μA

Flashovers	$U_{G3, G5}$	= 8,1	kV
within 1 minute	max. 2		
within 15 minutes	max. 5		

Stray emission			
Vertical deflection switched off, no brightening on screen visible	$U_{G3, G5}$	= 8,1	kV

Warm-up-time	max. 8 s		
Test conditions	U_F	= 6,0	V
	R_1	~ 0,1	Ω
Regulated power supply	I	> 6	A

The measuring time is from switch on of the heaters until a raster is visible. Brightness and contrast controls should be set for normal operation.

Colour coordinates	x	y
red	0,653	0,323
green	0,286	0,607
blue	0,141	0,061

Cathode currents for white	D	= 9600 K +5 M.P.C.D.
CIE-coordinates	x	= 0,282
	y	= 0,294
red	38%	
green	32%	
blue	30%	

Cathode current ratio	
red-blue	0,9.....1,5
red-green	1,6.....1,5
blue-green	0,6.....1,2

6
Glass- and Screen Data
(see Figure 6)

Glass transmission at screen centre	43,5%
Brightness at the screen centre	≈ 85 cd/m ² ± 10%
Test conditions	U _A = 29,5 kV, I _A = 1 mA
Overscanning	105%
Exact adjustment for horizontal and vertical linearity	
Colour temperature white	D 9600 K

Phosphors	
green -	cadmium free, gold activated
blue -	superpigmented blue
red -	superpigmented high Europium red

Persistence of phosphors	
Time to decay to 10% of initial peak value - medium short	
red	ca. 100 μs
green	20 - 40 μs
blue	11 - 17 μs


Pitch at the centre of tube (horizontal screen pitch - center to center distance of identical colour phosphor stripes)	0,74 mm
---	---------

Surface	polished
---------	----------

Visible screen area (nominal)	1839 cm ²
-------------------------------	----------------------

Deflection angle	
diagonal	102°
horizontal	94°
vertical	62°

Figure 6
Phosphor and Screen Dimensions

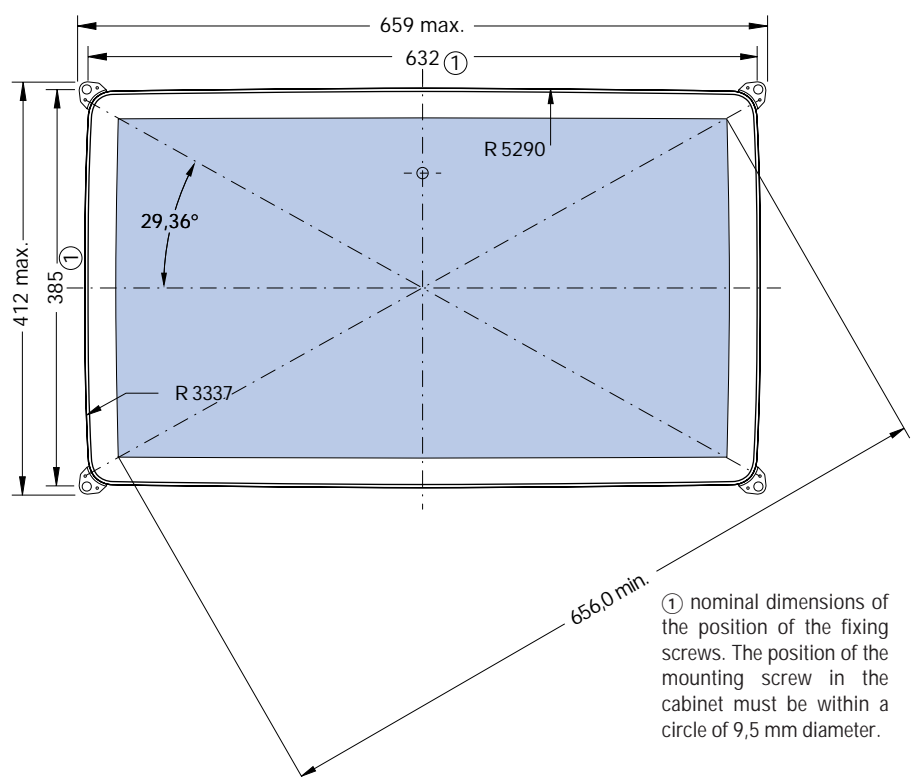

7
Notes for Test and Adjustment


Adjustment of focus voltage
Conditions: $U_{G3, G5}$
 $U_A = 29,5 \text{ kV}$, $U_K = 170 \text{ V}$,
 $I_{AP} = 3,5 \text{ mA}$ ①

Test chart crosshatch pattern
18 squares = 19 grid lines horizontal
14 squares = 15 grid lines vertical
103% picture width and height.
Optimal adjustment of focus between horizontal- and vertical lines at the centre of the screen.

Test cut-off voltage area $U_{G2, G4}$
Conditions: $U_A = 29,5 \text{ kV}$
Beam undeflected and brightness- and contrast controls to minimum.
 U_K at the cathode to be tested $U_K = 170 \text{ V}$
 U_K to other cathodes $U_K = 250 \text{ V}$
Turn U_{G2} -control from 200 V to cut-off.
The cut-off has to be within the range of 315 - 670 V.

① The peak beam current of 3,5 mA corresponds roughly to 400 μA average.

Figure 7
Recommended Cathode Voltage

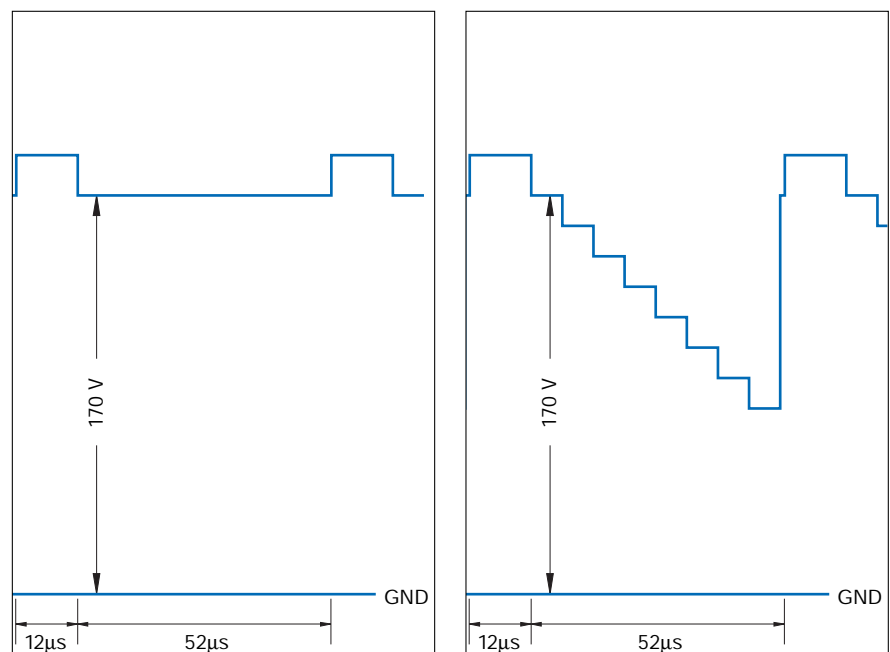

Adjustment of grid 2 voltage $U_{G2, G4}$

a) Individual cut-off adjustment

Set brightness- and contrast controls to minimum. All three cathodes at 170 V. Increase $U_{G2, G4}$ until the cut-off spot of the first gun appears. Reduce U_K of the two other guns until their cut-off spot is reached.

b) Automatic cut-off with black-level clamping

Set brightness- and contrast controls to minimum. Connect one of the three cathodes to an oscilloscope. Set DC-input to display 200 V.
Turn $U_{G2, G4}$ -control to the recommended cathode voltage of 170 V.

c) Automatic cut-off without black-level clamping

Test pattern grey scale.

Adjust contrast- and brightness-controls to linear grey scale.

Absolute values of voltage jumps from step to step are constant.

The last grey value is different to the black level. Set contrast control at $I_A \sim 500 \mu A$. Turn U_{G2} -control to the recommended cathode voltage of 170 V, (see figure 7).

8
Mechanical Data and
Dimensional Drawings

Overall length	441 ± 5,0 mm
Neck diameter	29,1 +1,5/-0,6 mm
Outside dimensions	
Diagonal (Including rimband)	712,6 ± 2,4 mm
Horizontal (Including lugs)	659 mm max.
Vertical (Including lugs)	412 mm max.
Screen Dimensions	
Diagonal	658 ± 2,0 mm
Horizontal	573,4 ± 1,6 mm
Vertical	323,2 ± 1,6 mm
Area	1.839 cm ² nom.
Base	JEDEC B 12-285
Anode contact	7,92 IEC 67-III-2, JEDEC J1-21
Weight	appr. 30,2 kg

Notes to outline drawings

- ① Anode contact 7,92 according to IEC 67-III-2, JEDEC J1-21
- ② This area is free of external conductive coating and must be kept clean.
- ③ Implosion protection frame and external conductive coating are galvanically separated from each other. They can be connected taking into consideration the existing safety regulations.
- ④ The external conductive coating must be connected to the negative high voltage terminal. Conduction cross-section $A = 1 \text{ mm}^2$.
- ⑤ The tube base is in a circle of a diameter max. = 55 mm with respect to the tube axis. The socket has to be connected by flexible wires only.
- ⑥ Nominal dimensions of the position of the fixing screws. The nominal dimensions are designed for the use of fixing screws with a diameter up to 9,5 mm.
- ⑦ One out of the four mounting lugs may deviate by max. 1,0 mm to the plane of the other three.
- ⑧ Z-points are reference points for the distance to X and Y. (Figure 9)
- ⑨ Minimum space to be reserved for mounting lug.
- ⑩ Joint plate not included. Maximum thickness of joint plate is 3,7 mm.

Figure 8
Anode Contact ①

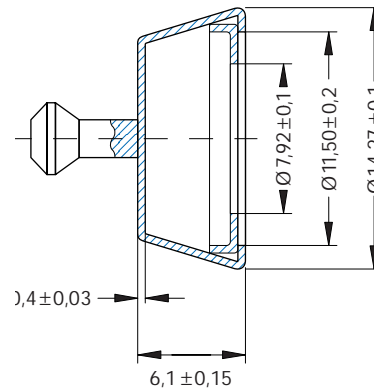


Figure 9
Panel Reference Points ⑧


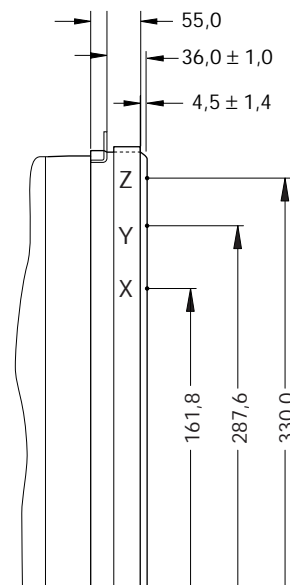


Figure 10
Overall Dimensions of Tube,
Top View

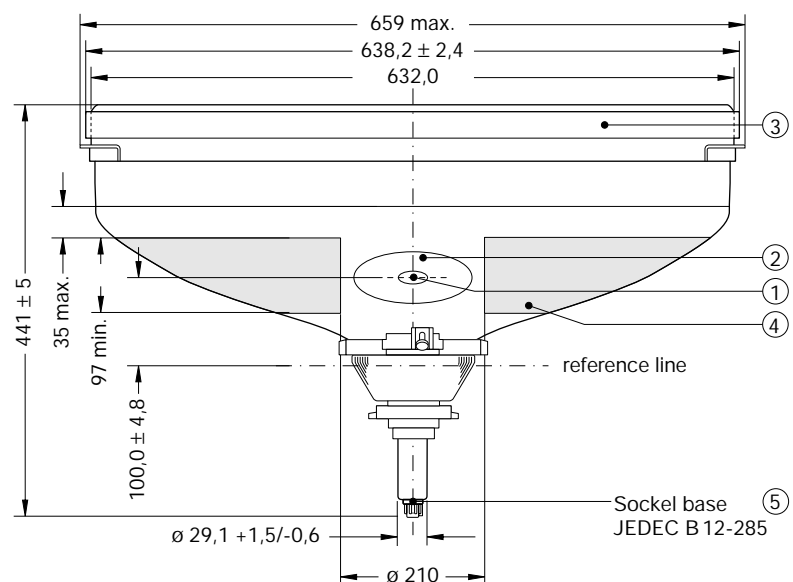

For design purposes use only 1:1 drawings

Figure 11
Overall Dimensions of Tube,
Side View


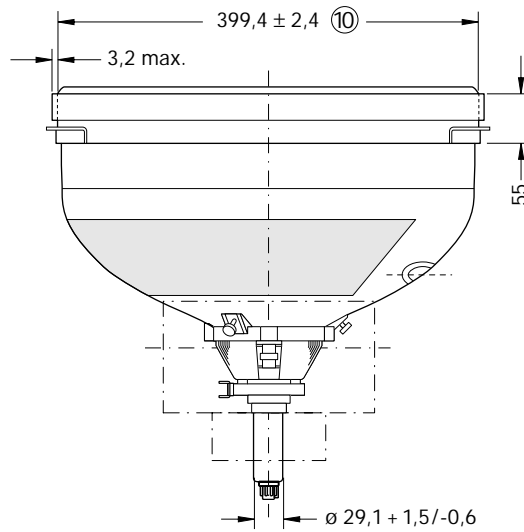


Figure 12
Overall Dimensions of Tube, Front
View

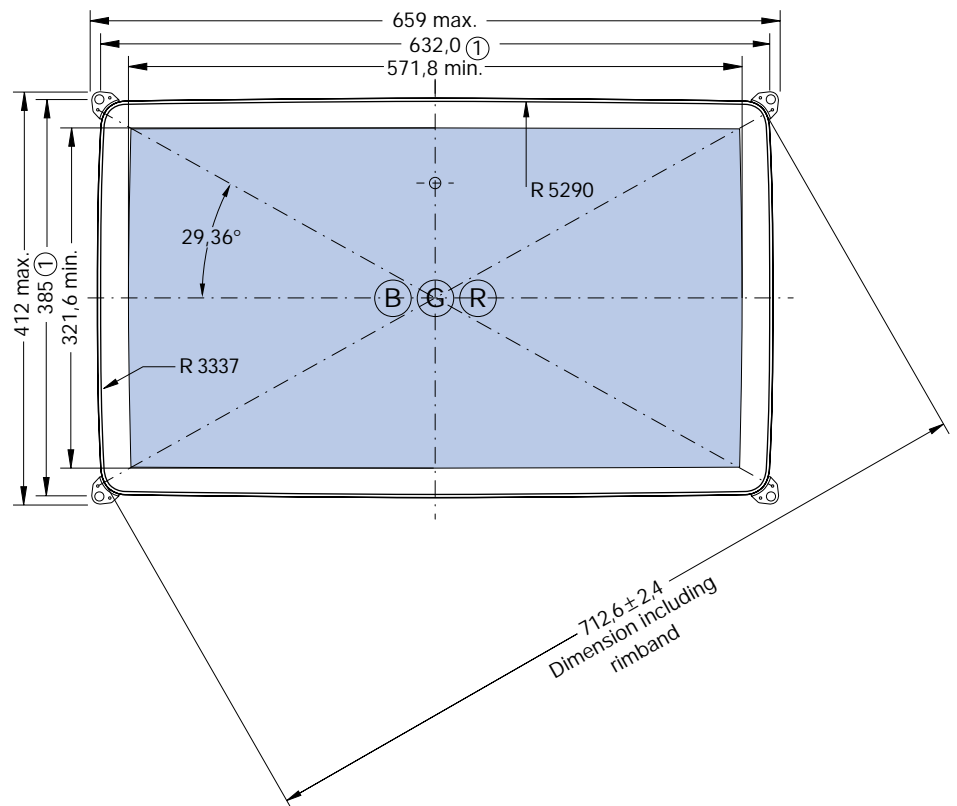

**For design purposes use only
1:1 drawings**

Figure 13
Detail Dimensions of Lug




Figure 14
Dimensions of Lug, View B





Figure 15
External Coating

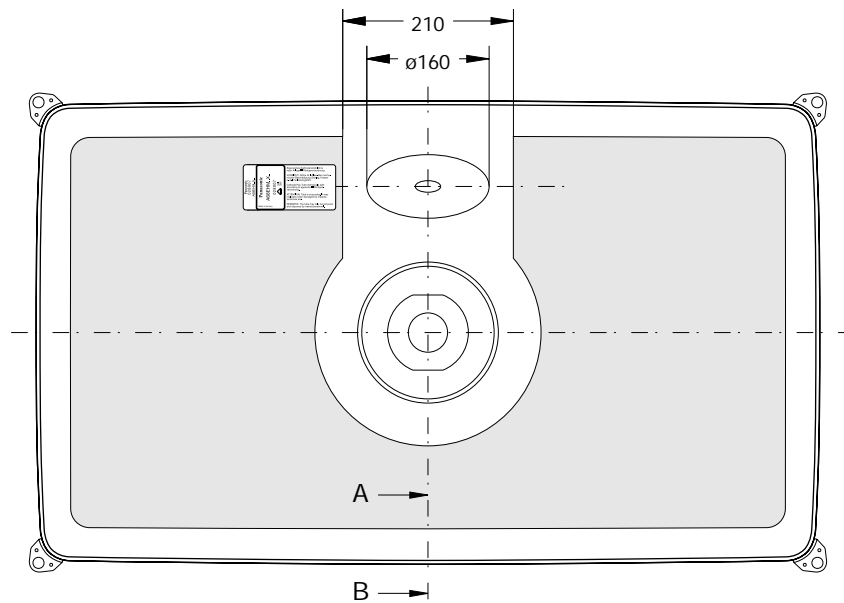

For design purposes use only 1:1 drawings

Figure 16
Implosion Frame
(External Coating, Section A - B)


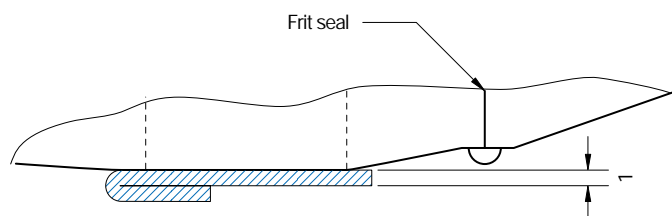


Figure 17
Funnel Radial Coordinates

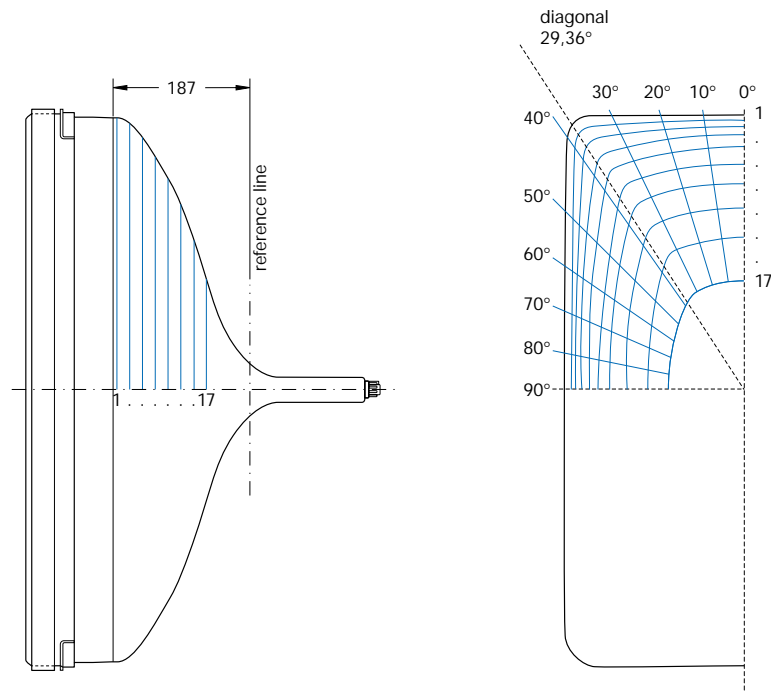


**For design purposes use only
1:1 drawings**


Nominal Outside Contour Radial Coordinates													
No.	Height from ref. line	Major Axis		Diag. Axis									Minor Axis
		0°	10°	20°	29,36°	30°	40°	50°	60°	70°	80°	90°	
1	182,5	314,5	318,5	332,2	351,9	351,7	294,8	250,5	223,0	206,3	197,2	194,3	
2	180,0	313,6	318,0	331,7	351,3	351,1	294,3	250,1	222,7	205,9	196,9	194,0	
3	170,0	310,6	314,8	327,9	346,6	346,1	291,1	247,5	220,4	203,9	195,0	192,1	
4	160,0	305,6	309,2	320,4	336,2	336,0	284,7	243,0	217,0	201,0	192,3	189,5	
5	150,0	298,2	300,9	309,3	321,2	321,0	275,5	236,8	212,3	197,1	188,8	186,2	
6	140,0	288,6	290,6	296,8	305,6	305,5	265,2	229,6	206,7	192,3	184,4	181,9	
7	130,0	277,9	279,2	283,4	289,4	289,3	254,0	221,3	200,0	186,6	179,1	176,8	
8	120,0	265,7	266,5	268,9	272,4	272,3	241,7	211,9	192,2	179,7	172,8	170,6	
9	110,0	251,9	252,2	253,2	254,7	254,6	228,9	201,3	183,2	171,6	165,2	163,1	
10	100,0	235,6	235,7	235,8	236,0	235,9	213,7	189,2	172,7	162,1	156,1	154,2	
11	90,0	216,3	216,3	216,3	216,3	216,2	198,0	176,1	161,1	151,5	146,0	144,3	
12	80,0	195,5	195,5	195,5	195,5	195,4	181,2	162,0	148,8	140,2	135,4	133,8	
13	70,0	173,3	173,3	173,3	173,3	173,3	163,0	146,9	135,6	128,2	124,0	122,7	
14	60,0	149,6	149,6	149,6	149,6	149,5	142,9	130,4	121,4	115,4	112,0	110,8	
15	50,0	123,9	123,9	123,9	123,9	123,9	120,1	112,0	105,8	101,5	99,0	98,2	
16	40,0	96,0	96,0	96,0	96,0	96,0	94,2	90,8	88,1	86,2	85,1	84,7	
17	30,0	70,2	70,2	70,2	70,2	70,2	70,2	70,2	70,2	70,2	70,2	70,2	

Figure 18 (left)
Tube Base

Figure 19 (right)
Tube Base, Section C - D

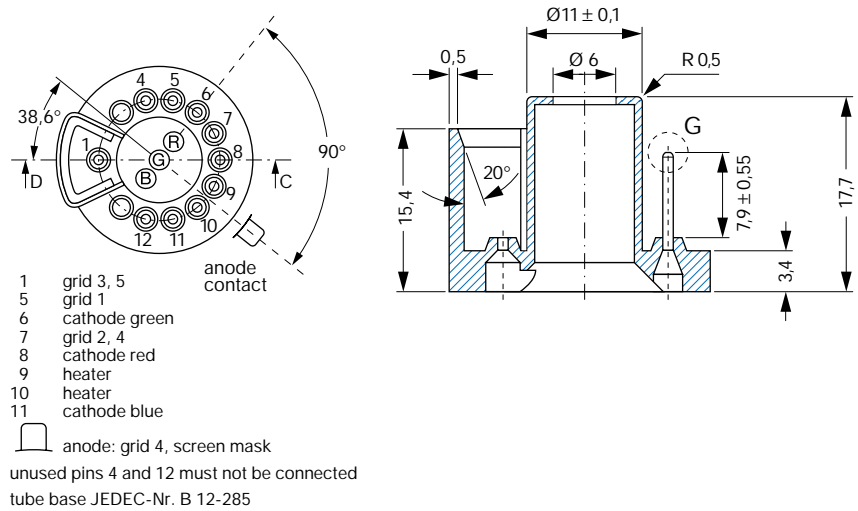

**For design purposes use only
1:1 drawings**

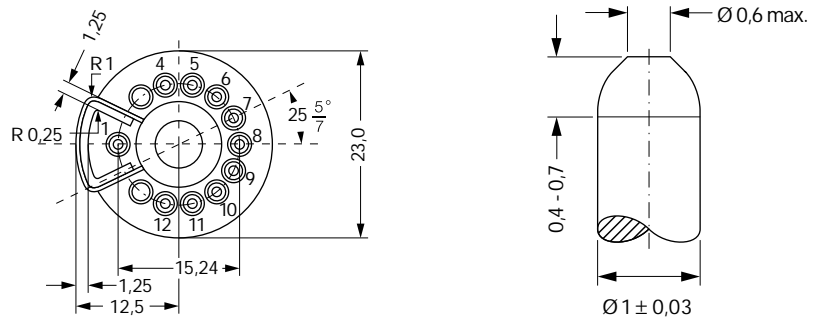


**9
Limiting Values**

Heater voltage	U_F	= 6,0 - 6,6 V	(I)
Anode voltage	$U_{A \text{ max.}}$	= 33 kV	
Anode voltage	$U_{A \text{ min.}}$	= 25 kV	
Anode current	$I_{A \text{ max.}}$	= 1,7 mA	(IV)
Focusing voltage grid 3, 5	$U_{G3, G5 \text{ max.}}$	= 10 kV	
Voltage between grid 3, 5 and grid 6	$U_{G3, G5, G6 \text{ max.}}$	= 24 kV	
Screen grid voltage peak	$U_{G2, G4p \text{ max.}}$	= 1,4 kV	

Cathode voltages			
positive	$U_{K \text{ max.}}$	= 200 V	
negative	$-U_{K \text{ max.}}$	= 0 V	
positive peak voltage	$U_{KP \text{ max.}}$	= 400 V	
negative peak voltage	$-U_{KP \text{ max.}}$	= -2 V	

Voltages between heater and cathode			
Heater negative to cathode	$U_{-FK \text{ max.}}$	= 275 V	(II)
Heater positive to cathode	U_{+FK}	= 0 V	
Heater to cathode peak voltage			
Heater negative to cathode	$U_{-FKP \text{ max.}}$	= 385 V	
Heater to cathode peak voltage			
Heater positive to cathode	$U_{+FKP \text{ max.}}$	= 200 V	(V)

Shock acceleration during transport and handling ($\leq 350 \text{ m/s}^2$) (III)

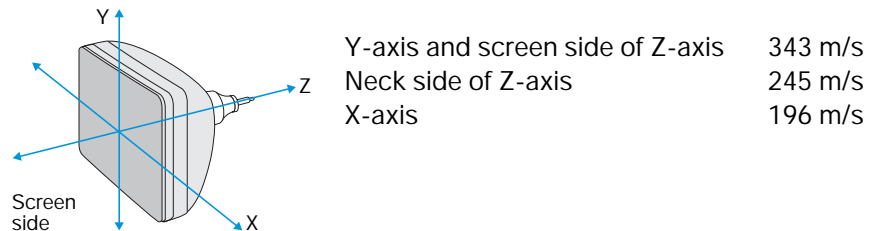

- (I) To secure good emission characteristics through the life, it is recommended to regulate the heater voltage at 6,3 V.
- (II) During warm up period of max. 15 sec the maximum voltage between heater and cathode must not exceed 385 V. This voltage must be reduced to 275 V at least time proportionally within 45 sec.
- (III) The tube has an integrated implosion protection according to VDE and BSI requirements. Rough tube mechanical treatment might lead to implosions.
- (IV) short term average (with ABL circuit) $I_{A \text{ max.}} = 1,5 \text{ mA}$
long term average (with ABL circuit) $I_{A \text{ max.}} = 1,2 \text{ mA}$
- (V) It is recommended to keep cathode potential positive against heater.

Cut-off voltage ratio	U_K -Quotient	= 1,16
-----------------------	-----------------	--------

X-radiation	max. 1 $\mu\text{Sv/h}$
-------------	-------------------------

Test conditions



Dose rate measuring in the distance of 100 mm to the glass surface.

ISO-dose rate	Figure 20
Maximum	1 $\mu\text{Sv/h}$

Parameters:

Anode voltage - anode current

Figure 20
ISO Dose Rate

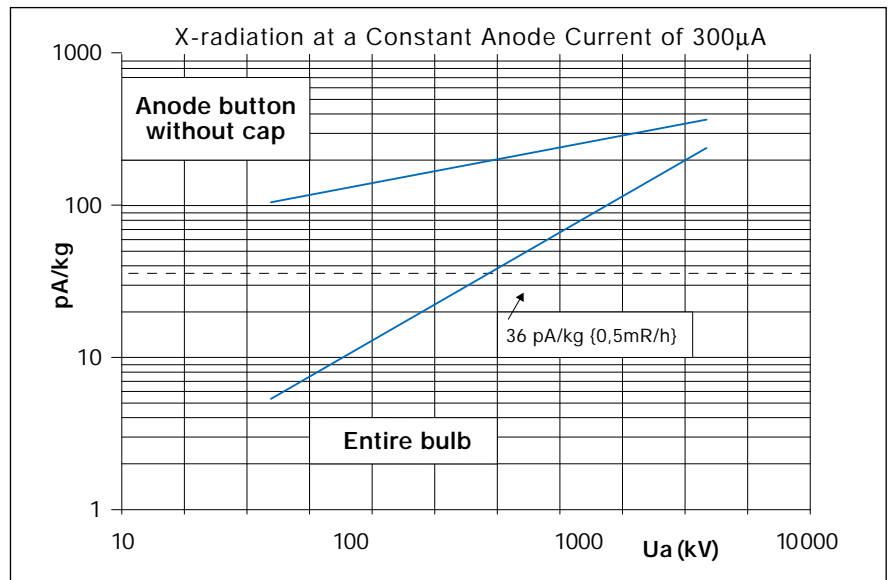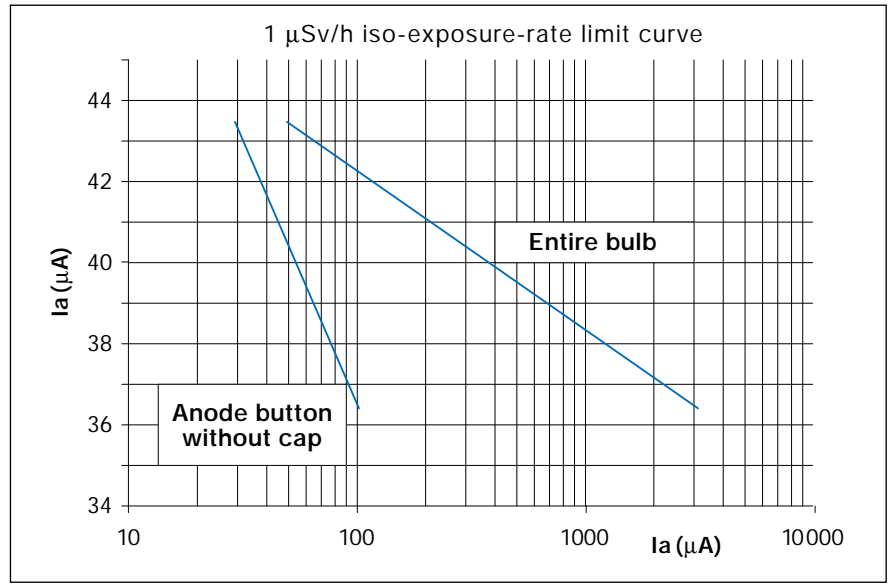

Customer has to take care, that adequate shielding of anode contact is provided

10
Screen- and Glass-Blemishes
Limits

Contrast blemishes Figure 21 + 22
Bubbles in glass, missing phosphor,
black spots.

The size of the blemish is defined $(L + W) / 2$
by length plus width divided by two.
Judgement of defects should not be
done before 10 minutes after switch on.

Viewing distance to classify the
contrast degree is 60 cm

For definition of defect size and contrast degree template can be used.

Defects with high contrast

The defect remains visible if template is moved from 0,7 to 1,3 filter.

Defects with medium contrast

Defect disappears if template is moved from 0,7 to 1,3 filter.

Screen zones see Figure 23
Zone A, centre area 253 x 142 mm
Zone B, outside area
Zone C is defined as the unscreened
area of the faceplate.

Figure 21
Blemishes, High Contrast


Blemish size (mm)	Limited blemishes		Distance (mm)
	A	A+B	
>1,0	0	0	-
0,8...<1,0	0	1	-
0,5...<0,8	1	3	80
0,25...<0,5	2	4	50 ①
< 0,25 ②	unlimited	unlimited	-

- ① Accepted are three defects, minimum distance of 2 failures is 50 mm.
- ② Blemish size unlimited. Limited only by cloud in a viewing distance of 1 m.

Figure 22
Blemishes, Medium Contrast

Blemish size (mm)	Limited blemishes		Distance (mm)
	A	A+B	
>1,0	0	0	-
0,8...<1,0	1	2	80
0,5...<0,8	4	8	50 ①
< 0,5 ②	unlimited	unlimited	-

Figure 23
Screen Zones

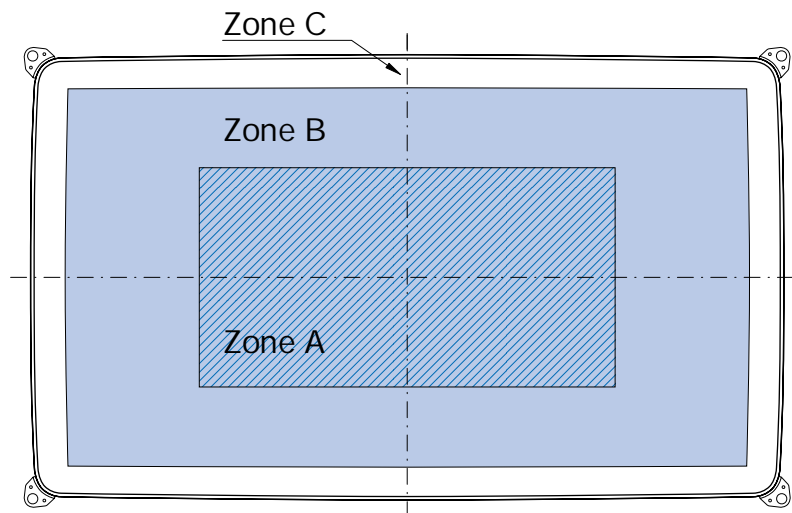

Scratches on the faceplate (see Figure 24 / Figure 25)

The sum of all scratches with a width of 0.05-0.15 mm should not exceed 180 mm.

Viewing distance ~1,0 m
Ambient light (activated screen) ~1 Lux
Ambient light (non-activated screen) ~1.000 Lux

Figure 24
Scratches on the Faceplate

Width (mm)	Length (mm)	Distance (mm)
$\leq 0,05$	unlimited	-
$0,05 \dots < 0,10$	50	19
$0,10 \dots \leq 0,15$	13	45
$> 0,15$	-	-

Figure 25 :
Stains on the Faceplate

Stain size (mm)	Limited stains		Distance (mm)
	A	A+B	
$> 1,3 \dots \leq 1,8$	1	2	80
$> 0,8 \dots \leq 1,3$	2	3	80

11
Geometry and Convergence
Specification

For the judgement of geometry and convergence the following conditions are valid:


1. Warm up time	15 min
2. Anode voltage	$U_A = 29,5 \text{ kV}$
3. Heater voltage	$U_F = 6,3 \text{ V}$
4. $U_{G2, G4}$ adjustment related to recommended cathode voltage	$U_{G2, G4} = 315 - 670 \text{ V}$ $U_K = 170 \text{ V}$
5. Focusing voltage adjustment for optimum of focus for vertical and horizontal lines at the centre	$U_{G3, G5} \quad I_{AP} = 3,5 \text{ mA}$
6. Screen has to face east	
7. Test pattern	Cross hatch pattern, white pattern
8. Colour temperature adjustment to white	$D = 9600 \text{ K}$
9. Tube has to be degaussed properly.	

Raster distortion	Figure 26
Test pattern	Cross hatch pattern, green only
The peak beam current of $200 \mu\text{A}$ corresponds roughly to $25 \mu\text{A}$ average.	$I_P = 200 \mu\text{A}$
Linearity, picture width and height should be correctly adjusted.	

Overscanning	5%
--------------	----

			max. (%)
north-south distortion	$[2(a+b)/(AD+BC)]$	•100%	1
north-south symmetry	$[2(a-b)/(AD+BC)]$	•100%	1
east-west distortion	$[2(c+d)/(AB+CD)]$	•100%	9
east-west symmetry	$[2(c-d)/(AB+CD)]$	•100%	1
horizontal trapezium	$[(AD-BC)/(AD+BC)]$	•100%	1
vertical trapezium	$[(AB-DC)/(AB+DC)]$	•100%	1
orthogonality			$\alpha = 90 \pm 0,35^\circ$

Figure 26
Raster Distortion, Separate

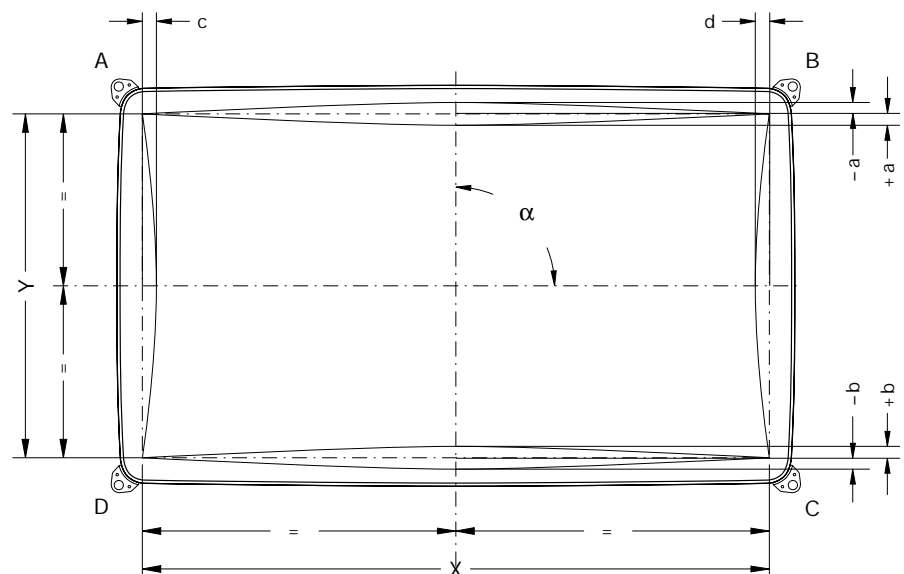


Rasterrotation

Figure 27

Cross hatch pattern green only.
Difference between the mechanical and the electrical centre line

Figure 27
Raster Rotation

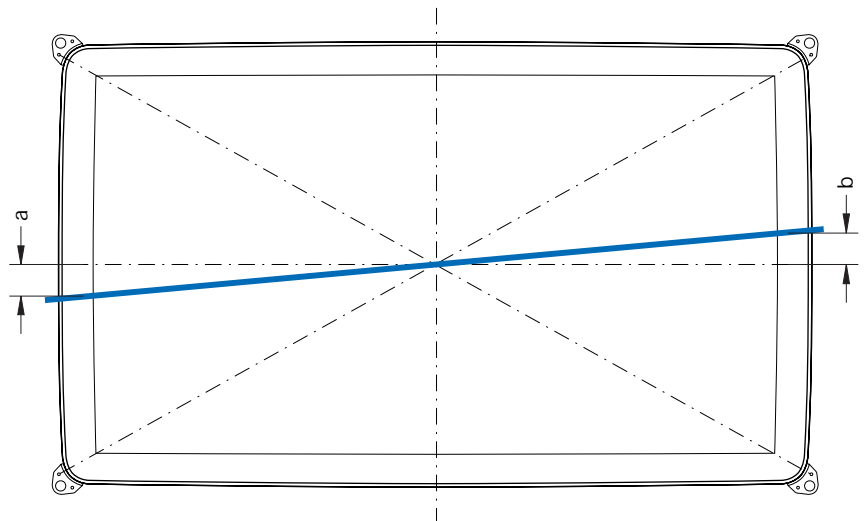


$a + b$ max. 3,5 mm

Sum of raster distortion

Figure 28

All raster failures have to be inside the shown frame.

Figure 28
Raster Distortion, Sum

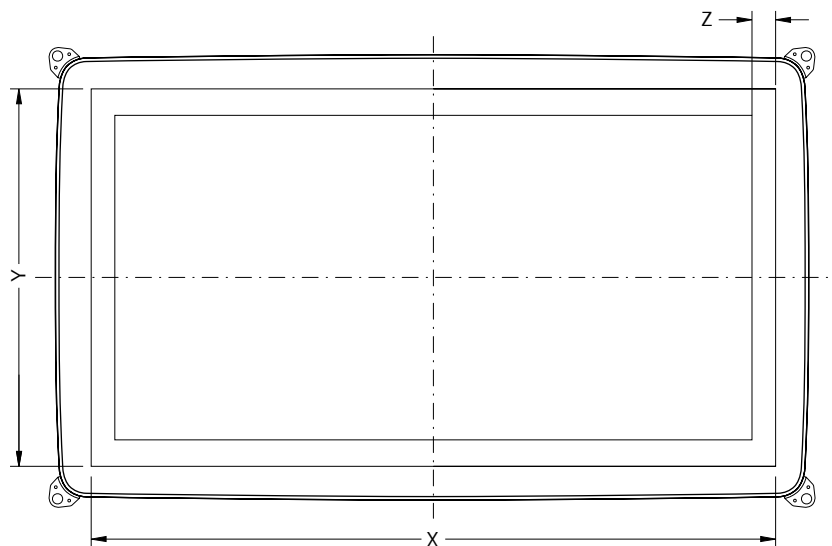

$X = 530$ mm
 $Y = 285$ mm
 $Z = 5$ mm

Rastershift


Horizontal max. 5,5 mm
 Vertical max. 5,5 mm
 Scanning switched off. Beam current adjusted to a visible spot. The value is the distance of the spot to the mechanical centre.

Convergence

Figure 29

Test pattern cross hatch white. $I_{AP} = 3500 \mu A$
 The peak beam current of 3500 μA corresponds roughly to 400 μA average.

Figure 29
Convergence

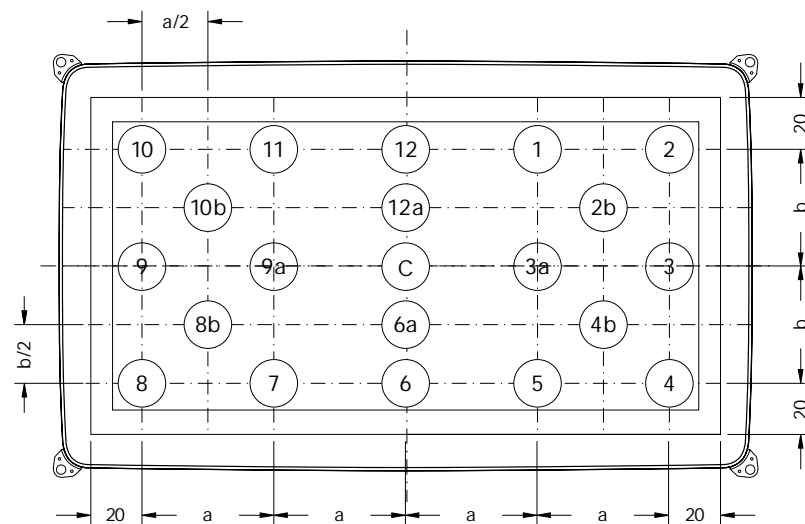

C	0,3 mm
2, 4, 8, 10	1,8 mm
3, 6, 9, 12	1,2 mm
1, 5, 7, 11	1,4 mm
3a, 9a	1,0 mm
2b, 4b, 8b, 10b	1,3 mm

Maximum values shown are related to the distance between the centre of red-, green- and blue lines, in vertical and horizontal direction.

White uniformity

Test pattern white
 Beam current $I_A = 1000 \mu A$
 Viewing distance 2 m
 Ambient light ~1 Lux

**Tube has to be degaussed. Check after 30 minutes warm-up.
 Tube is acceptable if there are no distinct colour differences visible.**

Purity

Test pattern white
 Beam current $I_A = 1000 \mu A$
 Viewing distance 2 m

Tube has to be degaussed. Wait for 30 minutes for the tube to warm up, then check each colour red, green and blue. The tube is acceptable if there is no discolouration visible.

12
General Notes

Absolute maximum ratings are limiting values of operating and environmental conditions applicable to any electronic device of a specified type as defined by its published data, and should not be exceeded under the worst probable conditions.

12.1
Limit values by IEC Publication

The equipment manufacturer must design so that, initially and throughout life, no absolute maximum value for the intended service is exceeded with any device under the worst probable operating conditions:

- * supply voltage variation
- * equipment and control adjustment
- * components spread and variation
- * load variations
- * signal variations
- * environmental conditions and also picture tube spread and variations.

12.2
Voltage between Heater and Cathode

The voltage between heater and cathode should be as small as possible.

12.3
Voltages between Cathode and Grids

Do not operate the tube unless all electrodes are connected to a DC potential. Do not exceed the limit value of any electrode. No electrode should be connected to a high voltage potential.

Test- or check circuits should be agreed with Matsushita Electronics (Europe) GmbH.

12.4
Screen


To avoid screen damages please pay attention to the following:

- * Do not operate the tube with a stationary cross hatch pattern or a similar test pattern.
- * Do not operate picture tube with a stationary luminary spot, except with an extremely low beam current.
- * Afterglow should not exceed 1,5 sec.
- * The anode voltage U_A has to be reduced to less than 15 kV within 1 sec after switch off or switching into standby.
- * If no bleeder resistor is used it has to be ensured by circuit design, that the tube will be discharged in a time <1 sec.

12.5
Spark Gaps

To avoid possible damages to tube or circuitry by internal flash over, spark gaps should be used.
For the connection of the spark gaps to the external conductive coating, the shortest possible wires should be used.
The connection to the external conductive coating should cover a large area.
Isolation resistors should be used in series with each grid and cathode wire.
The spark gaps should be designed for a breakdown voltage at the focusing electrode of 14 kV, at the other electrodes of 2kV.

Figure 30:
Spark Gaps -
Recommended Values

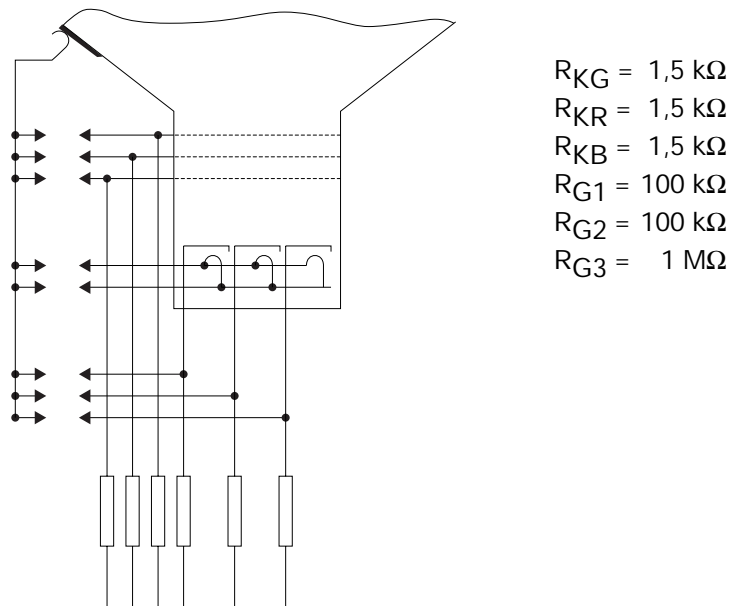

12.6
Degaussing

The tube has an internal shielding against external magnetic fields. The shield and the mask should be degaussed automatically whenever the TV-set is switched on.
To get sufficient degaussing a magnetomotive force with an initial value of minimum 500 ampere turns peak per coil is needed (see figure 31). The total number of turns is the sum of turns of each coil.
The time of current decay has to be continuously. The value of the degaussing current after 4 cycles should be 50% of the initial value (4 cycles 50Hz = 80 ms, 60Hz = 67 ms, see figure 31). Figures 33 and 34 show a possible layout of the degaussing coil, figure 35 shows a recommended degaussing circuit.
The reduction of current per half wave must be less than 10 percent. The residual value of magnetic flux must be less than 0,25 ampere turns peak per coil (see figure 32).

To avoid coupling of line frequency current a sufficient capacitor should be connected in parallel to the degaussing coil.

When using external degaussing coils vertical deflection of tube must be switched off. In this case the initial value of magnetic field strength at front panel should be min. 170 A/m .

Figure 31 (left)
Degaussing - Reduction of Current per Halfwave

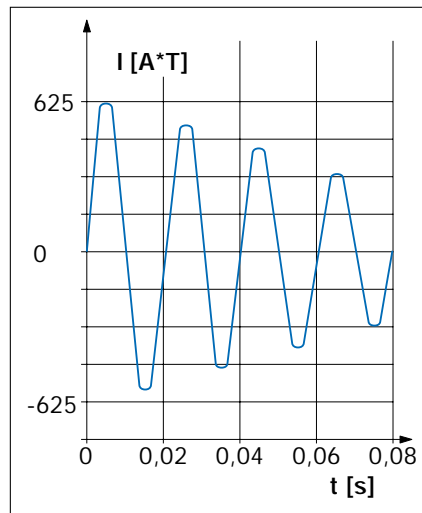


Figure 32 (right)
Degaussing - Residual Value of Magnetomotive Force

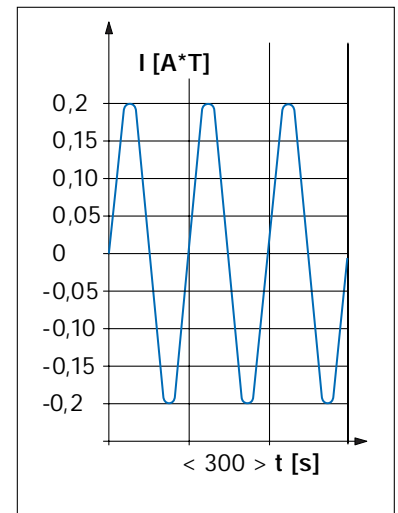


Figure 33
Placement of Degaussing Coil,
Top View

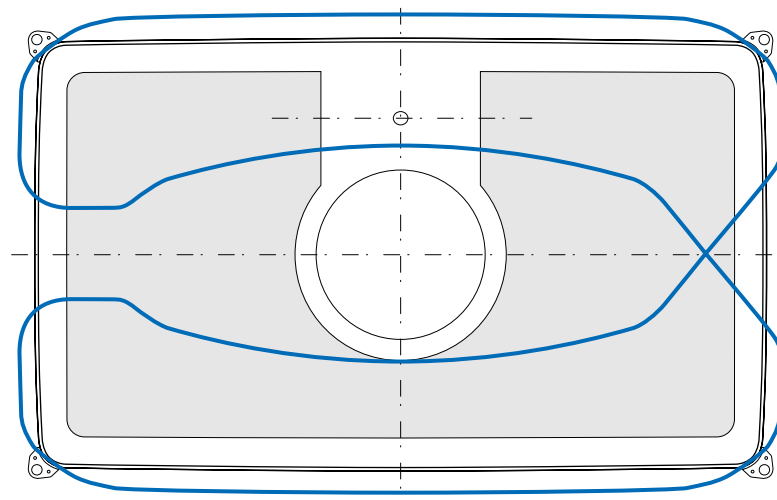


Figure 34
Placement of Degaussing Coil,
Side View


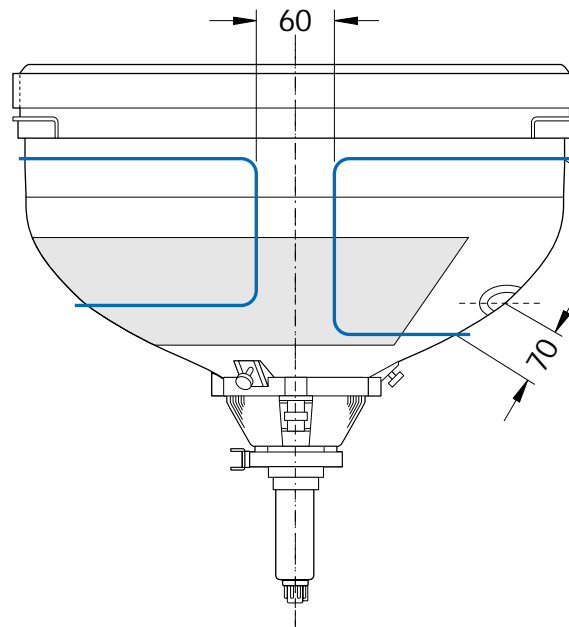


Figure 35
Degaussing Circuit

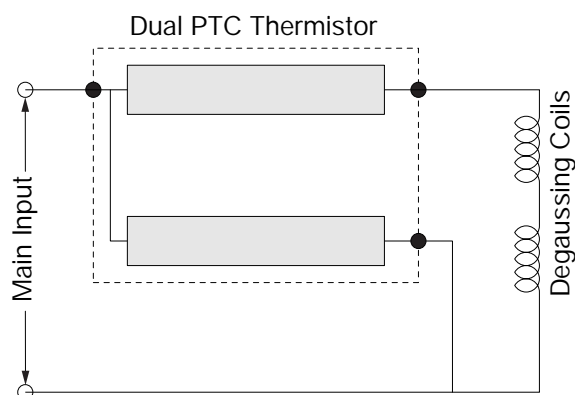

**12.7
Implosion Protection**

All picture tubes from Matsushita Electronics (Europe) GmbH are implosion protected according to VDE DIN 57860, IEC 65, BSI and CCIB. Care should be taken not to scratch or knock any part of the tube. Please handle tube careful to avoid any risk of implosion.


In all handling procedures prior to insertion into the cabinet, there is a risk of personal injury as a result of severe accidental damage to the tube. It is therefore recommended that protective clothing should be worn, particularly eye shielding.

Remember when replacing or servicing the tube assembly that a residual electrical charge may be carried by the anode contact and also the external coating if not earthed. Before removing the tube assembly from the equipment, earth the external coating and short the anode contact to the coating.

The final customer has to be informed about statements of implosion protection

- 12.8 Handling** Avoid any mechanical stress to the neck components during transport and handling, it could cause loss of performance.
- 12.9 Cabinet Design** Design of the cabinet has to be done according to 1:1 drawing and not to a tube sample or this specification.
- 12.10 Microphony** Intense vibration of the loudspeakers inside the TV set can result in a visible modulation of brightness. This can be minimized by a suitable design of the TV cabinet.
- 12.11 Transport** To avoid tube damage during transport, the following has to be taken into consideration:
- a. Single tubes
Single tubes must be delivered in Matsushita Electronics (Europe) GmbH designed packaging only and transported in the printed position.
 - b. TV set
This must be transported in the packing designed by the set manufacturer in the position printed on the carton. If the tube is transported with it's faceplate in a horizontal position it could cause irreparable damage to the shadow mask
- 12.12 Storage**
- a. Tubes must only be stored in dry and clean storage facilities. Tubes and polystyrene have to be protected against rain and humidity.
 - b. Temperature of tube should be room temperature.
- 12.13 Type Designation by Pro Electron and Tube Label**
- | | |
|-------------------------|--|
| Type | W 66 EKU 60X |
| TV picture tube | W |
| Screen diagonal (cm) | 66 |
| Family code (tube) | EKU |
| Member of family code | 60 |
| Tri-colour screen | X |
| Code of deflection yoke | see separate yoke specification (50Hz and 100Hz available) |

Figure 36
Tube Label (Example)

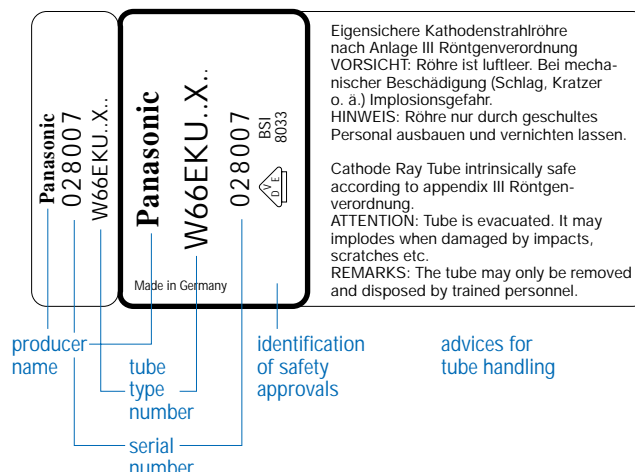

13
Used Formula Signs

Voltages

Anode voltage	U_A
Cathode voltage	U_K
Voltage cathode to heater	U_{KF}
Peak cathode voltage	U_{KP}
DC voltage grid 1, 2, 3, 4, 5	U_{G1} $U_{G2, G4}$ $U_{G3, G5}$
DC voltage between grid 2, 4 and cathode	$U_{G2, G4/K}$
Voltage between grid 3, 5 and grid 6	$U_{G3, G5, G6}$
Screen grid voltage peak	$U_{G2, G4p}$
Heater negative to cathode	U_{-FK}
Heater positive to cathode	U_{+FK}
Heater to cathode peak voltage	U_{-FKP}
Voltage between heater and cathode	U_{+FK}
Heater positive to cathode	
Heater voltage	U_F
Voltage peak to peak	U_{PP}

Currents

Anode current	I_A
Cathode Current	I_K
Leakage current cathode-heater	I_{KF}
Current Grid 1, 2, 3	I_{G1} I_{G2} I_{G3}
Heater current	I_F
Beam current	I_A
Deflection current horizontal peak to peak	$I_{HP P}$
Deflection current vertical peak to peak	I_{VPP}

Capacities

Outside capacity	C
Grid 1 to all other electrodes	C_{G1}
Cathode to all other electrodes	C_K
Grid 3 to all other electrodes	$C_{G3, G5}$
Anode to external conductive coating	$C_{A/M}$
Anode to metal rimband	$C_{A/Z}$
Grid 1 to cathode	$C_{G1/K}$

Resistance

Active resistance of horizontal deflection coils	R_H
Active resistance of vertical deflection coils	R_V
Resistance of wires to cathodes green, red, blue	R_{KG} R_{KR} R_{KB}
Resistance of wires to grids 1, 2, 3	R_{G1} R_{G2} R_{G3}

Indices

Anode	A
Heater	F
Grid	G
Cathode	K
Outside conductive coating	M
Peak to peak	p-p
Edge to edge	e-e
Limit value	max.
Peak value	P
Point on Panel Diagonal	Z

Different Dimensions and Abbreviations

Ambient temperature	T amb
Absolut beam limiter	ABL
Brightness or inductance	L
British Standard Institution	BSI
DC	direct current
eff.	effective
Inductance horizontal deflection coils	L _H
Inductance vertical deflection coils	L _V
International Electrotechnical Commission	IEC
International Standards Organisation	ISO
Joint Electron Device Engineering Council	JEDEC
Minimum Perception Colour Difference	M.P.C.D.
Multi Functional Triode	MFT
Multi Pre Focus	MPF
N, S, E, W	north, south, east, west
Overlapped Field Lens	OLF
Pulse duration	t _p
Sensitivity	LI ² e-e
Sensitivity	RI ² e-e
Verband Deutscher Elektrotechniker e.V.	VDE

Panasonic

**MATSUSHITA ELECTRONICS
(EUROPE) GmbH**

Fritz-Müller-Strasse 112
D-73730 Esslingen · Germany
P.O. Box 100954
D-73709 Esslingen · Germany

Phone ++49(0)711 / 3104-536
Fax ++49(0)711 / 3104-377
E-mail: Marketing.Sales@Panasonic-CRT.de
