

—Standard Valves—

4037-A
Valve

4037-A VALVE

HOT CATHODE MERCURY VAPOUR
RECTIFIER.

SPECIFICATION.

Cathode.


Oxide coated filament.
Constant voltage type.

Base.

Standard British 4 pin.


Dimensions.

Overall length $4\frac{7}{8}$ " (12.4 cms.)
Overall diameter $2\frac{1}{4}$ " (5.7 cms.)
Net weight 0.13 lbs. (60 gms.)

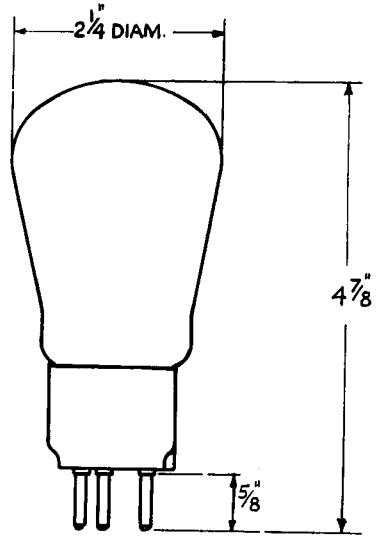

Constants.

Filament voltage 4 volts
Nominal filament current 2 amps.
Maximum peak inverse voltage 1,000 volts
Maximum peak anode current 0.8 amps.



OUTPUT AS HALF WAVE RECTIFIER.

250 mA. at 300 volts.

V.4037-A.1
Nov. 1937

PRINTED IN
ENGLAND