

**Betriebsdaten:**

Typical operation:

Exemple d'utilisation: **6 C 6**

| | | |
|----------|-------|-----------------|
| U_1 | . . . | 6,3 V |
| I_f | . . . | 0,3 A |
| U_a | . . . | +250 V= |
| U_{g1} | . . . | -3 V= |
| U_{g2} | . . . | +100 V= |
| U_{g3} | . . . | 0 |
| I_a | . . . | 2 mA |
| I_{g2} | . . . | 0,5 mA |
| S | . . . | 1,225 mA/V |
| D | . . . | 0,067 % |
| R_i | . . . | 1500 k Ω |
| R_k | . . . | 1200 Ω |

Grenzdaten:

Ratings: / Conditions maxima:

| | | |
|----------|-------|--------------|
| U_a | . . . | +300 V= |
| U_{g2} | . . . | +100 V= |
| R_{g1} | . . . | 3 M Ω |
| N_a | . . . | 1 W |
| N_{g2} | . . . | 0,1 W |
| U_{fk} | . . . | 90 V |

**Prüfdaten:**

Test operation:

Vérification:



| | | |
|----------|-------|--------------|
| U_f | . . . | 6,3 V \sim |
| U_a | . . . | +200 V= |
| U_{g1} | . . . | 0 & -2 V= |
| U_{g2} | . . . | +100 V= |
| U_{g3} | . . . | 0 |

**In Stellung 13
auf Steuerwirkung
prüfen**


In position 13 is to
prove the control grid.
En position 13 vérifier
l'action de commande de la
grille.

Patent-Röhrenprüfer Modell W 19


MAX FUNKE, Adenau-Eifel 5. 54.

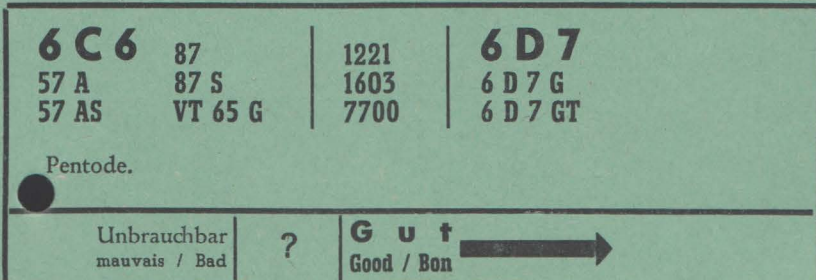

10 mA



6 C 6



6 D 7