



6B7

6B7

TWIN DIODE—REMOTE-CUTOFF PENTODE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage.	6.3	ac or dc volts
Current.	0.3	amp

Direct Interelectrode Capacitances (Pentode Unit):

Grid No.1 to Plate ⁰	0.007 max.	$\mu\mu\text{f}$
Input.	3.5	$\mu\mu\text{f}$
Output.	9.5	$\mu\mu\text{f}$

⁰ With external shield connected to cathode.

Mechanical:

Mounting Position.	Any
Maximum Overall Length	4-17/32"
Seated Length.	3-25/32" \pm 1/8"
Maximum Diameter	1-9/16"
Bulb	ST-12
Cap.	Small
Base	Small-Shell Small 7-Pin
Basing Designation for BOTTOM VIEW	7D

Pin 1 - Heater
 Pin 2 - Pentode Plate
 Pin 3 - Pentode Grid No.2
 Pin 4 - Diode No.2 Plate



Pin 5 - Diode No.1 Plate
 Pin 6 - Cathode, Pentode Grid No.3
 Pin 7 - Heater Cap - Pentode Grid No.1

PENTODE UNIT AMPLIFIER - Class A₁

Maximum Ratings, Design-Center Values:

PLATE VOLTAGE.	300 max.	volts
GRID-No.2 (SCREEN) VOLTAGE	125 max.	volts
GRID-No.2 SUPPLY VOLTAGE	300 max.	volts
GRID-No.1 (CONTROL-GRID) VOLTAGE:		
Positive bias value.	0 max.	volts
PLATE DISSIPATION.	2.25 max.	watts
GRID-No.2 DISSIPATION.	0.3 max.	watt
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode	90 max.	volts
Heater positive with respect to cathode	90 max.	volts

Characteristics:

Plate Voltage.	100	180	250	250	volts
Grid-No.2 Voltage.	100	75	100	125	volts
Grid-No.1 Voltage.	-3	-3	-3	-3	volts
Plate Resistance (Approx.)	0.3	1.0	0.8	0.6	megohm
Transconductance	950	840	1000	1125	μmhos

(continued on next page)

←Indicates a change.

6B7



6B7

TWIN DIODE--REMOTE-CUTOFF PENTODE

Grid-No.1 Bias (Approx.) for					
Cathode-Current Cutoff . .	-17	-13	-17	-21	volts
Plate Current.	5.8	3.4	6	9	ma
Grid-No.2 Current.	1.7	0.9	1.5	2.3	ma

DIODE UNITS

Maximum Ratings, Design-Center Values:

→ PLATE CURRENT (For Each Diode) 1.0 max. ma

Diode Considerations:

See front of this Section.

For additional data, refer to RESISTANCE-COUPLED AMPLIFIER CHARTS at the front of this Section.

The curve shown under type 2B7 also applies to the pentode unit of the 6B7.

→ Indicates a change.

DEC. 30, 1947

TUBE DEPARTMENT

DATA


RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY



6B7

6B7

AVERAGE PLATE CHARACTERISTICS PENTODE UNIT

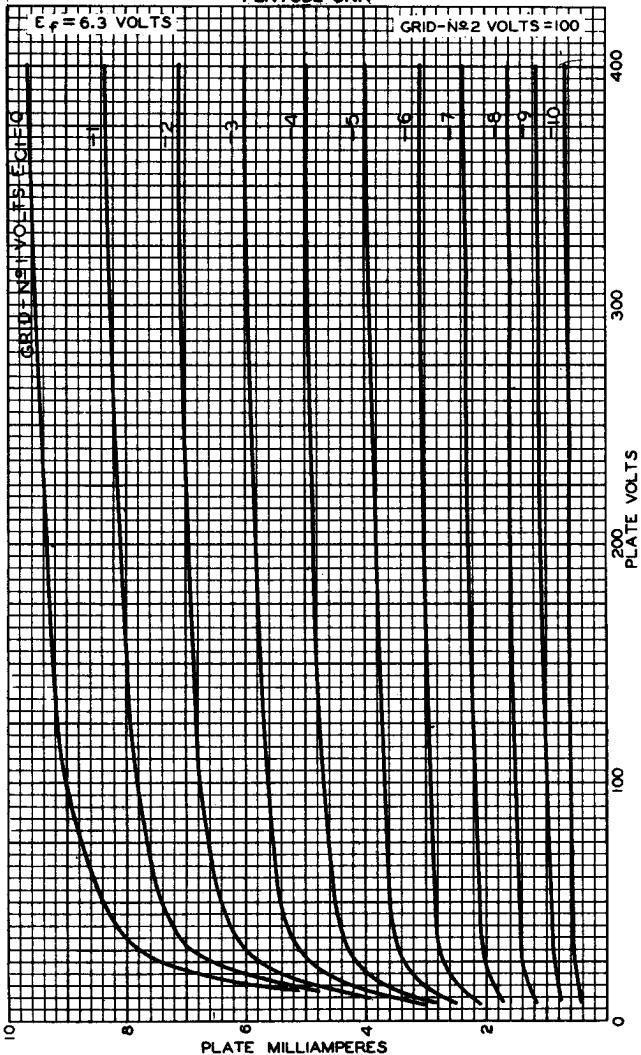

FEB. 17, 1938

PLATE MILLIAMPERES
TUBE DEPARTMENT

92CM-4880

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

6B7




AVERAGE CHARACTERISTICS PENTODE UNIT

$E_f = 6.3$ VOLTS

GRID-N $\#$ 2 VOLTS = 100

PLATE VOLTS = 250

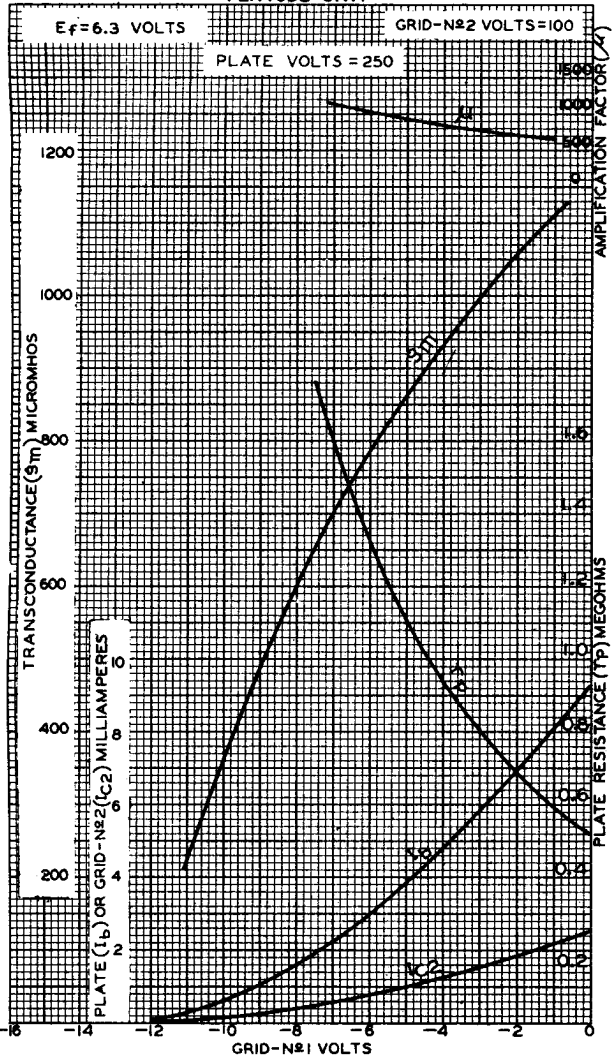

FEB. 25, 1937

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-4745