



8020

8020

HALF-WAVE HIGH-VACUUM RECTIFIERDATA**Electrical:****Filament, Thoriated Tungsten:**

Voltage 5 volts
 Current 5.5-6.5 amp
 Direct Interelectrode Capacitance:
 Anode to Filament . . . 1.4 μf
 Tube Voltage Drop
 at 100 ma. 200 volts

Mechanical:

Mounting Position Vertical, Base Down
 Overall Length 7-1/2" \pm 1/2"
 Maximum Diameter 2-5/16"
 Bulb T-18
 Cap. Medium
 Base Medium 4-Pin, Bayonet

RECTIFIER SERVICE**Maximum Ratings, Absolute Values:**

PEAK INVERSE ANODE VOLTAGE 40000 max. volts
 PEAK ANODE CURRENT 750 max. ma.
 AVERAGE ANODE CURRENT 100 max. ma.

SURGE - LIMITING DIODE SERVICE**Maximum Ratings, Absolute Values:**

FILAMENT VOLTAGE 5.8 max. volts
 PEAK FORWARD ANODE VOLTAGE 12500 max. volts
 AVERAGE ANODE DISSIPATION 75 max. watts

Typical Operation:

Filament Voltage 5.5 volts
 Peak Forward Anode Voltage 10000 volts
 Minimum Peak Anode Current 2 amp

8020



8020

HALF-WAVE HIGH-VACUUM RECTIFIER


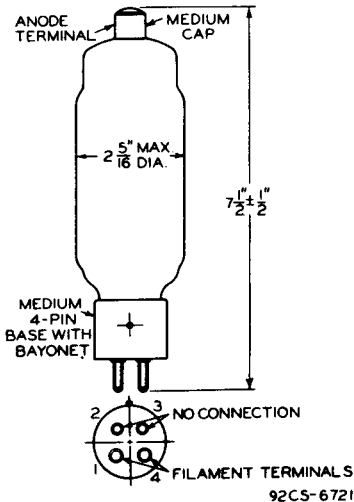


PLATE CHARACTERISTICS

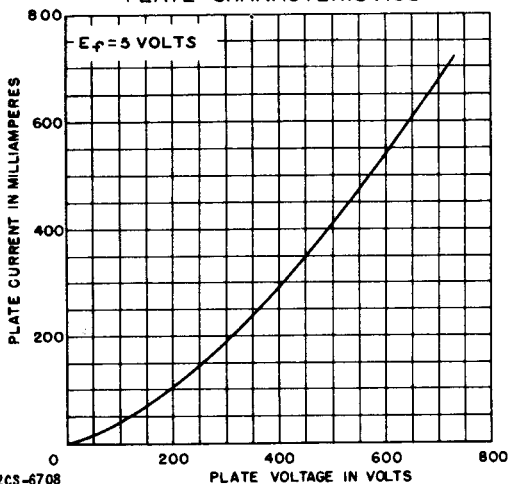

MAY 1, 1946

TUBE DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

CE-6721-6708