


MARCONI VALVES

MARCONI VALVES

for use with 6-volt Accumulator

TYPES LS 5, LS 5A AND LS 5B

POWER VALVES

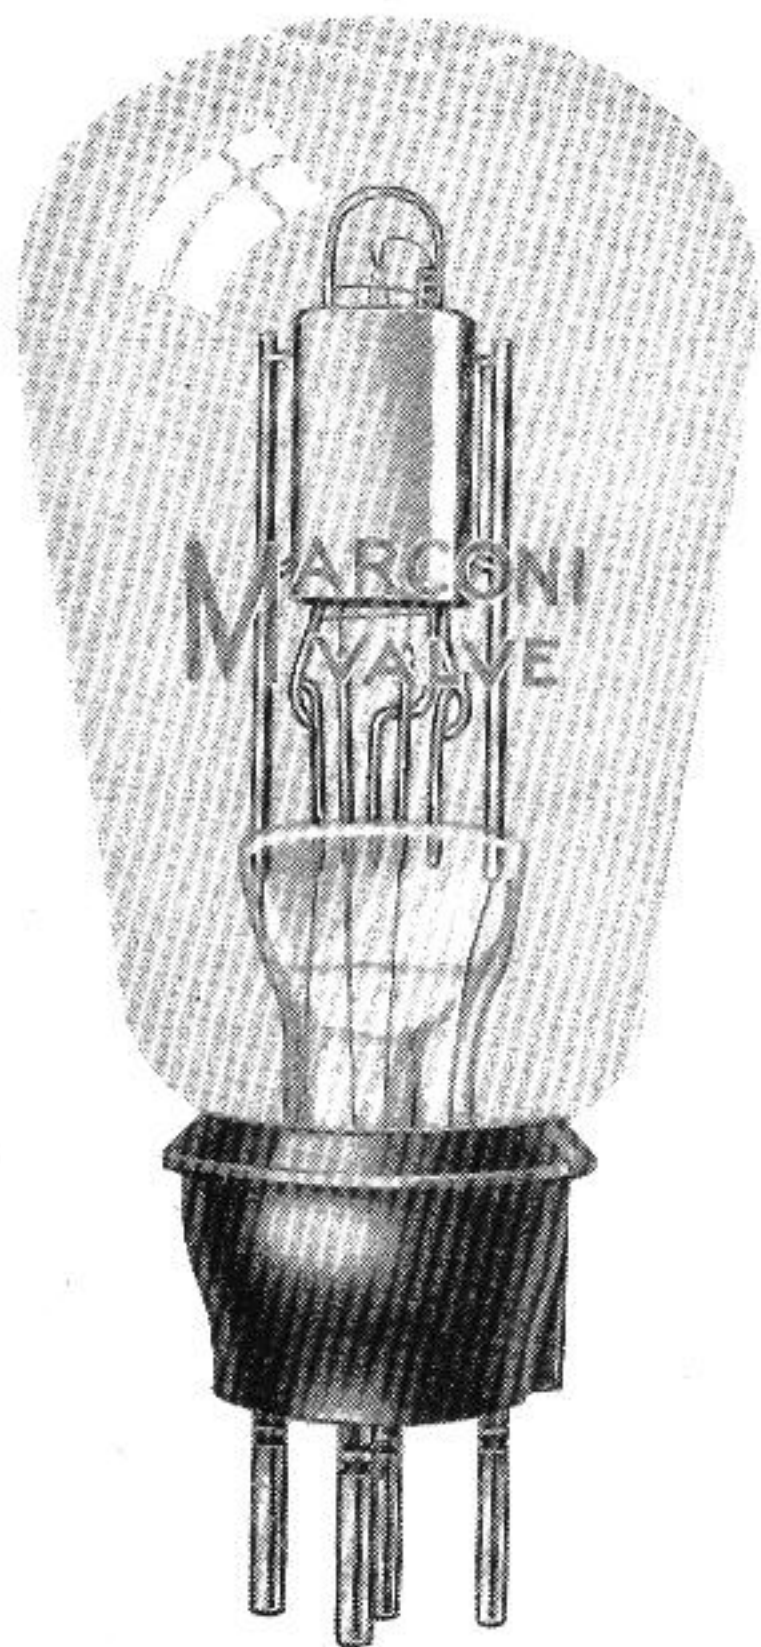

*Approximate Overall Dimensions,
135 x 56 mm.*

TYPE LS 5

FOR POWER AMPLIFICATION.

As a transmitter the maximum permissible anode dissipation is 10 watts. The anode voltage should not exceed 400 volts.

TYPE LS 5a

A modification of the LS 5, particularly suitable for the final stages of low-frequency amplifiers for large loud speakers. It will deal with considerably larger amplitudes than the L.S. 5 Valve. Maximum anode loss 13.5 watts.

TYPE LS 5b

A modified LS 5 having a high amplification factor, suitable for use in the early stages of an amplifier employing L.S. 5 and L.S. 5a types in the later stages. Maximum anode loss 10 watts.

Type	Fil. Volts	Fil. Current (Amps.)	Anode Volts	Amplification Factor	Impedance (ohms)	Price.
LS 5	4.25-5.25	.8	400	5	6,000	25/-
LS 5a	4.25-5.25	.8	400	2.5	2,750	25/-
LS 5b	4.25-5.25	.8	400	20	25,000	25/-

The valve in the purple box