


TUNG-SOL



GLASS BULB
SMALL-BUTTON MINIATURE
7 PIN BASE E7-1
OUTLINE DRAWING
JEDEC 6-3

BEAM PENTODE

MINIATURE TYPE


COATED UNIPOTENTIAL CATHODE

HEATER

6.3±0.6 VOLTS 1200 MA.

AC OR DC

ANY MOUNTING POSITION



BOTTOM VIEW
BASING DIAGRAM
JEDEC 7CV

THE 6CU5 IS A MINIATURE BEAM POWER PENTODE DESIGNED FOR USE IN THE AUDIO OUTPUT STAGE OF TELEVISION RECEIVERS. HIGH-POWER SENSITIVITY AND HIGH EFFICIENCY AT LOW PLATE AND SCREEN VOLTAGES ENABLE THE 6CU5 TO PROVIDE RELATIVELY HIGH POWER OUTPUT. EXCEPT FOR HEATER RATINGS, THE 6CU5 IS IDENTICAL TO THE 12CU5.

DIRECT INTERELECTRODE CAPACITANCES - APPROX.
WITHOUT EXTERNAL SHIELD

GRID #1 TO PLATE	0.6	pf
GRID #1 TO CATHODE & GRID #3, HEATER, AND GRID #2	13.0	pf
PLATE TO CATHODE & GRID #3, HEATER, AND GRID #2	8.5	pf

RATINGS

INTERPRETED ACCORDING TO DESIGN MAXIMUM SYSTEM

CLASS A₁ AMPLIFIER

MAXIMUM PEAK HEATER-CATHODE VOLTAGE:		
HEATER NEGATIVE WITH RESPECT TO CATHODE	200	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE ^A	200	VOLTS
MAXIMUM PLATE VOLTAGE	150	VOLTS
MAXIMUM GRID #2 (SCREEN) VOLTAGE	130	VOLTS
MAXIMUM GRID #1 (CONTROL-GRID) VOLTAGE:		
POSITIVE BIAS VALUE	0	VOLTS
MAXIMUM PLATE DISSIPATION	7	WATTS
MAXIMUM GRID #2 INPUT	1.4	WATTS
MAXIMUM BULB TEMPERATURE (AT HOTTEST POINT ON BULB SURFACE)	220	°C

INDICATES A CHANGE.

^A DC COMPONENT MUST NOT EXCEED 100 VOLTS.

CONTINUED FROM PRECEDING PAGE



TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS
CLASS A₁ AMPLIFIER

PLATE VOLTAGE	120	VOLTS
GRID #2 VOLTAGE	110	VOLTS
GRID #1 VOLTAGE	-8	VOLTS
PEAK AF GRID #1 VOLTAGE	8	VOLTS
ZERO-SIGNAL PLATE CURRENT	49	MA.
MAXIMUM-SIGNAL PLATE CURRENT	50	MA.
ZERO-SIGNAL GRID #2 CURRENT	4	MA.
MAXIMUM-SIGNAL GRID #2 CURRENT	8.5	MA.
PLATE RESISTANCE (APPROX.)	10 000	OHMS
TRANSCONDUCTANCE	7 500	μMHOS
LOAD RESISTANCE	2 500	OHMS
TOTAL HARMONIC DISTORTION	10	PERCENT
SIGNAL POWER OUTPUT (MAX.)	2.3	WATTS

MAXIMUM CIRCUIT VALUES

GRID #1 CIRCUIT RESISTANCE:		
FOR FIXED-BIAS OPERATION (MAX.)	0.1	MEGOHM
FOR CATHODE-BIAS OPERATION (MAX.)	0.5	MEGOHM

SIMILAR TYPE REFERENCE: Except for heater warm-up time and heater ratings, the 6CU5 is identical to the 12CU5.

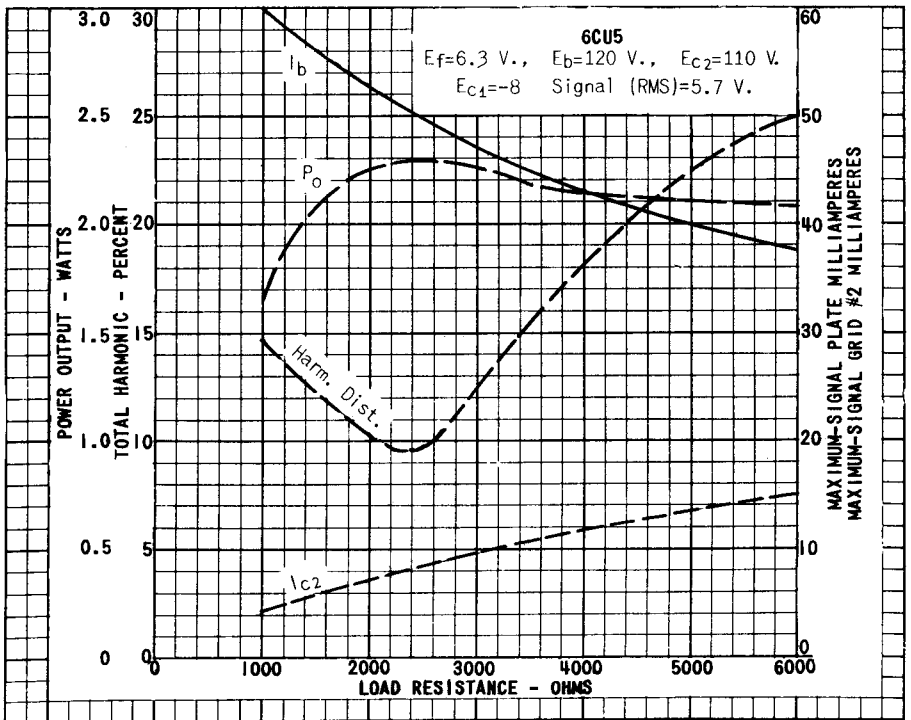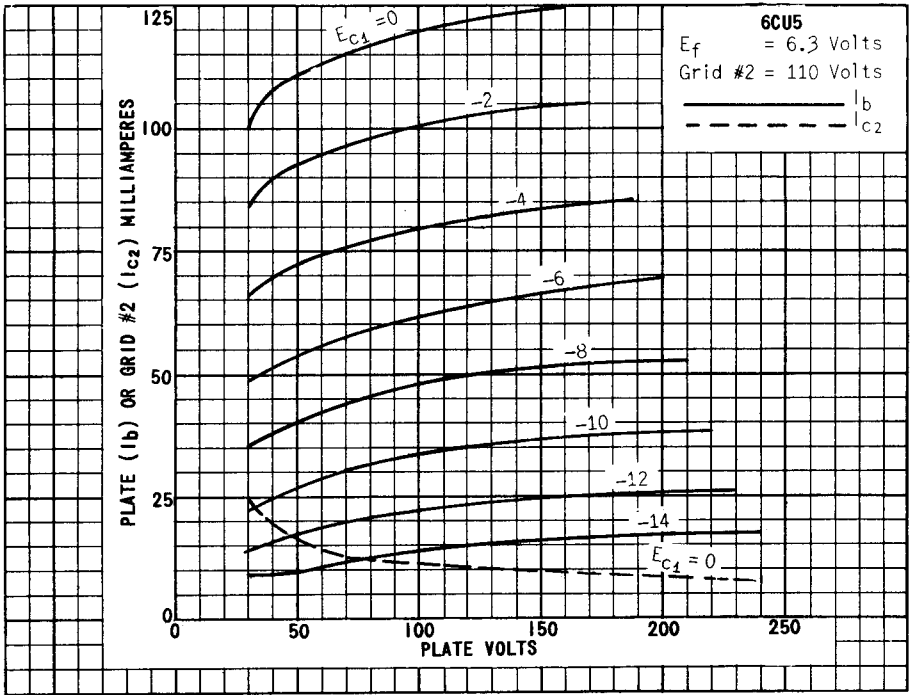

POWERED BY U. S. A.