


6KZ8

Basing Designation for BOTTOM VIEW. 9FZ

- Pin 1 - Triode Plate
- Pin 2 - Pentode
Grid No. 1
- Pin 3 - Pentode
Cathode,
Pentode
Grid No. 3,
Internal
Shield
- Pin 4 - Heater



- Pin 5 - Heater
- Pin 6 - Pentode
Plate
- Pin 7 - Pentode
Grid No. 2
- Pin 8 - Triode
Cathode
- Pin 9 - Triode
Grid

AMPLIFIER — Class A₁

Maximum Ratings, Design-Maximum Values:

	Triode Unit	Pentode Unit	
Plate Voltage.	330 max.	330 max.	volts
Grid-No. 2 (Screen-Grid) Supply Voltage	-	330 max.	volts
Grid-No. 2 Voltage.	See <i>Grid-No. 2 Input Rating Chart</i> at front of Receiving Tube Section		
Grid-No. 1 (Control-Grid) Voltage:			
Positive-bias value.	0 max.	0 max.	volts
Plate Dissipation.	2.5 max.	2.5 max.	watts
Grid-No. 2 Input:			
For grid-No. 2 voltages up to 165 volts.	-	0.55 max.	watt
For grid-No. 2 voltages between 165 and 330 volts.	See <i>Grid-No. 2 Input Rating Chart</i> at front of Receiving Tube Section		

Maximum Circuit Values:

Grid-No. 1-Circuit Resistance:

- For fixed-bias
operation. 0.25 max. 0.25 max. megohm
- For cathode-bias
operation. 0.5 max. 0.5 max. megohm

^a At heater amperes = 0.450.

^b At heater volts = 6.3.

^c The dc component must not exceed 100 volts.

^d With external shield JEDEC No. 315 connected to cathode of unit under test.



Medium-Mu Triode— Sharp-Cutoff Pentode

9-PIN MINIATURE TYPE

For Oscillator-Mixer Service in VHF TV-Tuner Applications

Electrical:

Heater Characteristics and Ratings:

Voltage (AC or DC)	6.3 ^a	6.3 ± 0.6	volts
Current	0.450 ± 0.030	0.450 ^b	amp
Warm-up time (Average)	11	-	sec

Peak heater-cathode voltage (Each Unit):

Heater negative with respect to cathode	200	max.	volts
Heater positive with respect to cathode	200 ^c	max.	volts

Direct Interelectrode Capacitances:^d

Triode Unit:

G _T to P _T	1.6		pf
Input: G _T to (K _T , G _{3P} +K _P +IS, H)	3.2		pf
Output: P _T to (K _T , G _{3P} +K _P +IS, H)	1.8		pf

Pentode Unit:

G _{1P} to P _P	0.01	max.	pf
Input: G _{1P} to (K _P +G _{3P} +IS, G _{2P} , H)	5.5		pf
Output: P _P to (K _P +G _{3P} +IS, G _{2P} , H)	3.4		pf
Heater to cathode (Each Unit)	3.2		pf

Characteristics, Class A₁ Amplifier:


	Triode Unit	Pentode Unit	
Plate Voltage	125	125	volts
Grid-No.2 Voltage	-	125	volts
Grid-No.1 Voltage	-1	-1	volt
Amplification Factor	46	-	
Plate Resistance (Approx.)	5400	200000	ohms
Transconductance	8500	7500	μmhos
Plate Current	13.5	12	ma
Grid-No.2 Current	-	4	ma
Grid-No.1 Voltage (Approx.) for plate μ _a = 10	-8	-8	volts

Mechanical:

Operating Position	Any
Type of Cathodes	Coated Unipotential
Maximum Overall Length	2-3/16"
Maximum Seated Length	1-15/16"
Length, Base Seat to Bulb Top (Excluding tip)	1-9/16" ± 3/32"
Diameter	0.750" to 0.875"
Dimensional Outline	See <i>General Section</i>
Bulb	T6-1/2
Base	Small-Button Noval 9-Pin (JEDEC No. E9-1)



AVERAGE PLATE CHARACTERISTICS Triode Unit

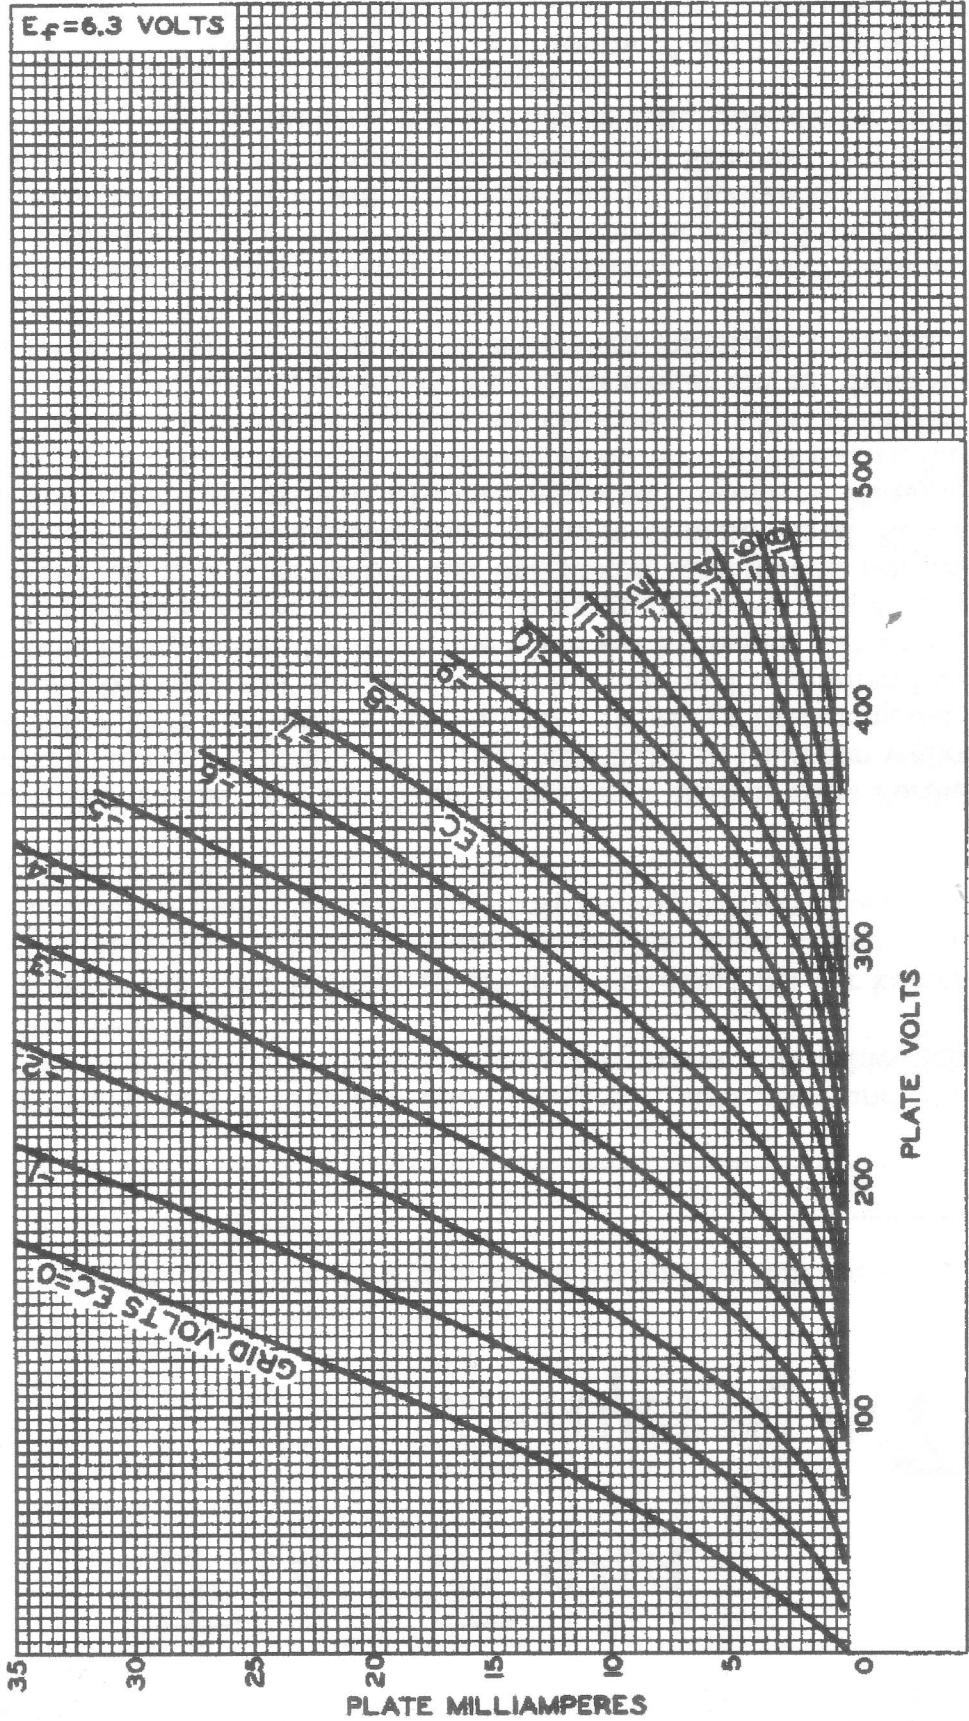


92CM-10421R1



6KZ8

AVERAGE CHARACTERISTICS Triode Unit

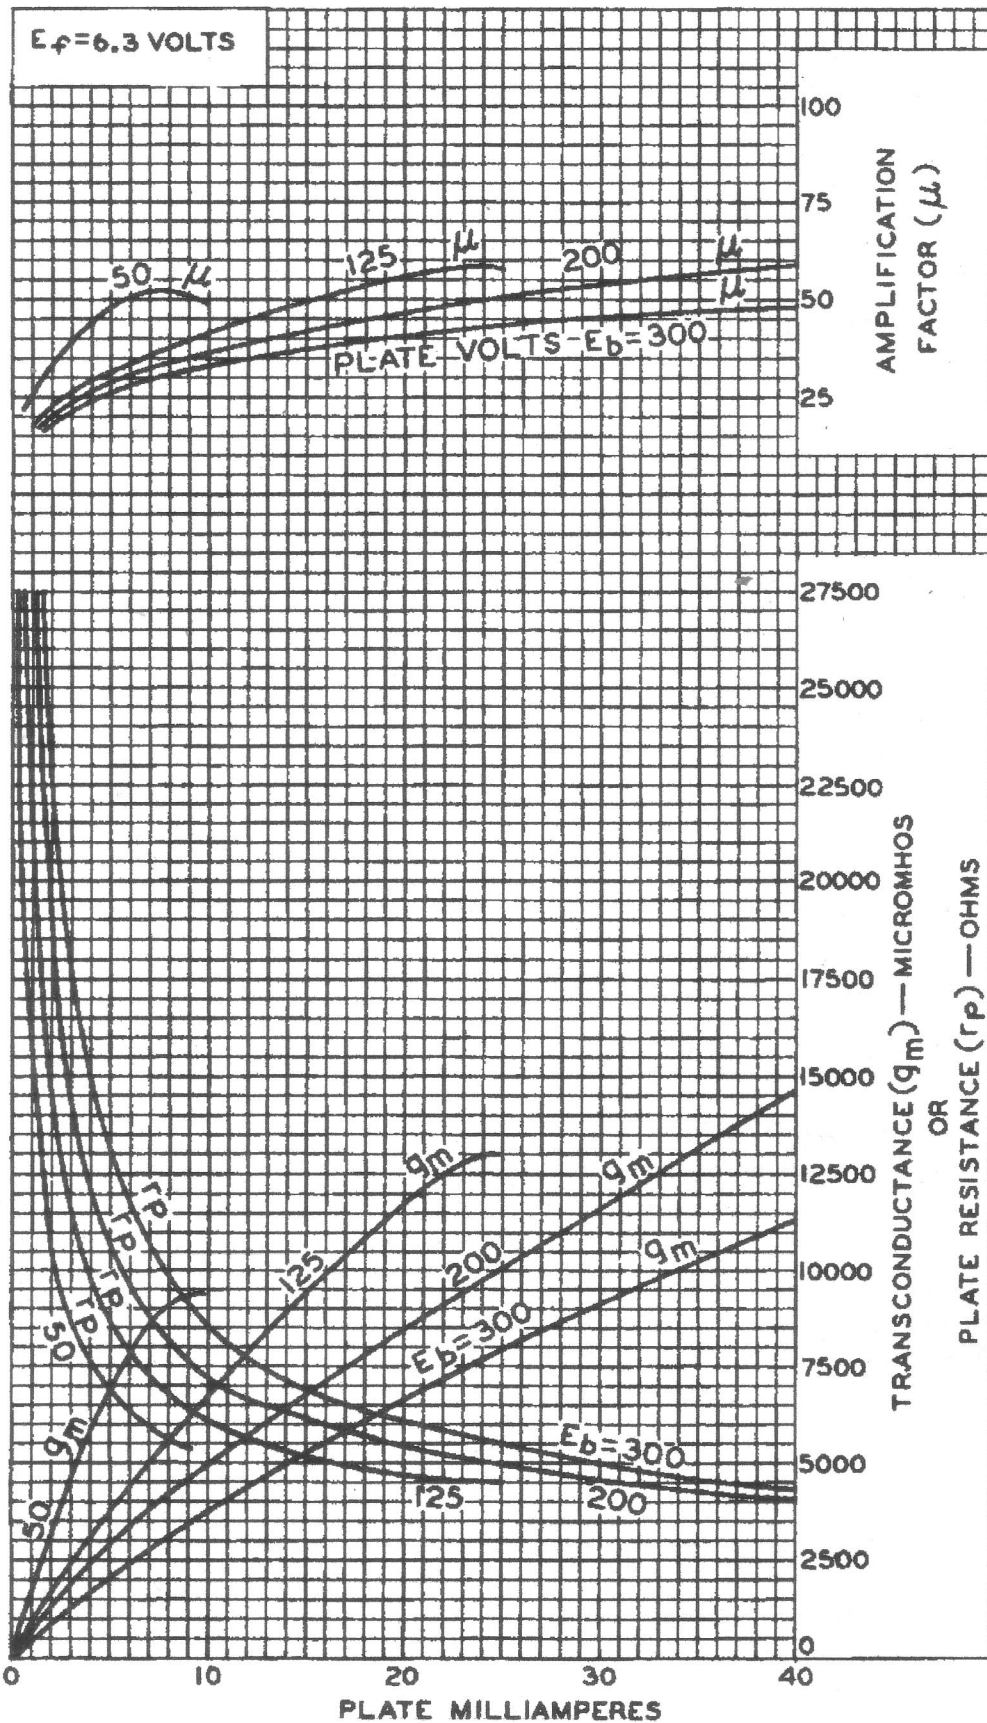

ELECTRON TUBE DIVISION

92CM-10428

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


RADIO CORPORATION OF AMERICA
Electronic Components and Devices

Harrison, N. J.



6KZ8

AVERAGE CHARACTERISTICS Pentode Unit

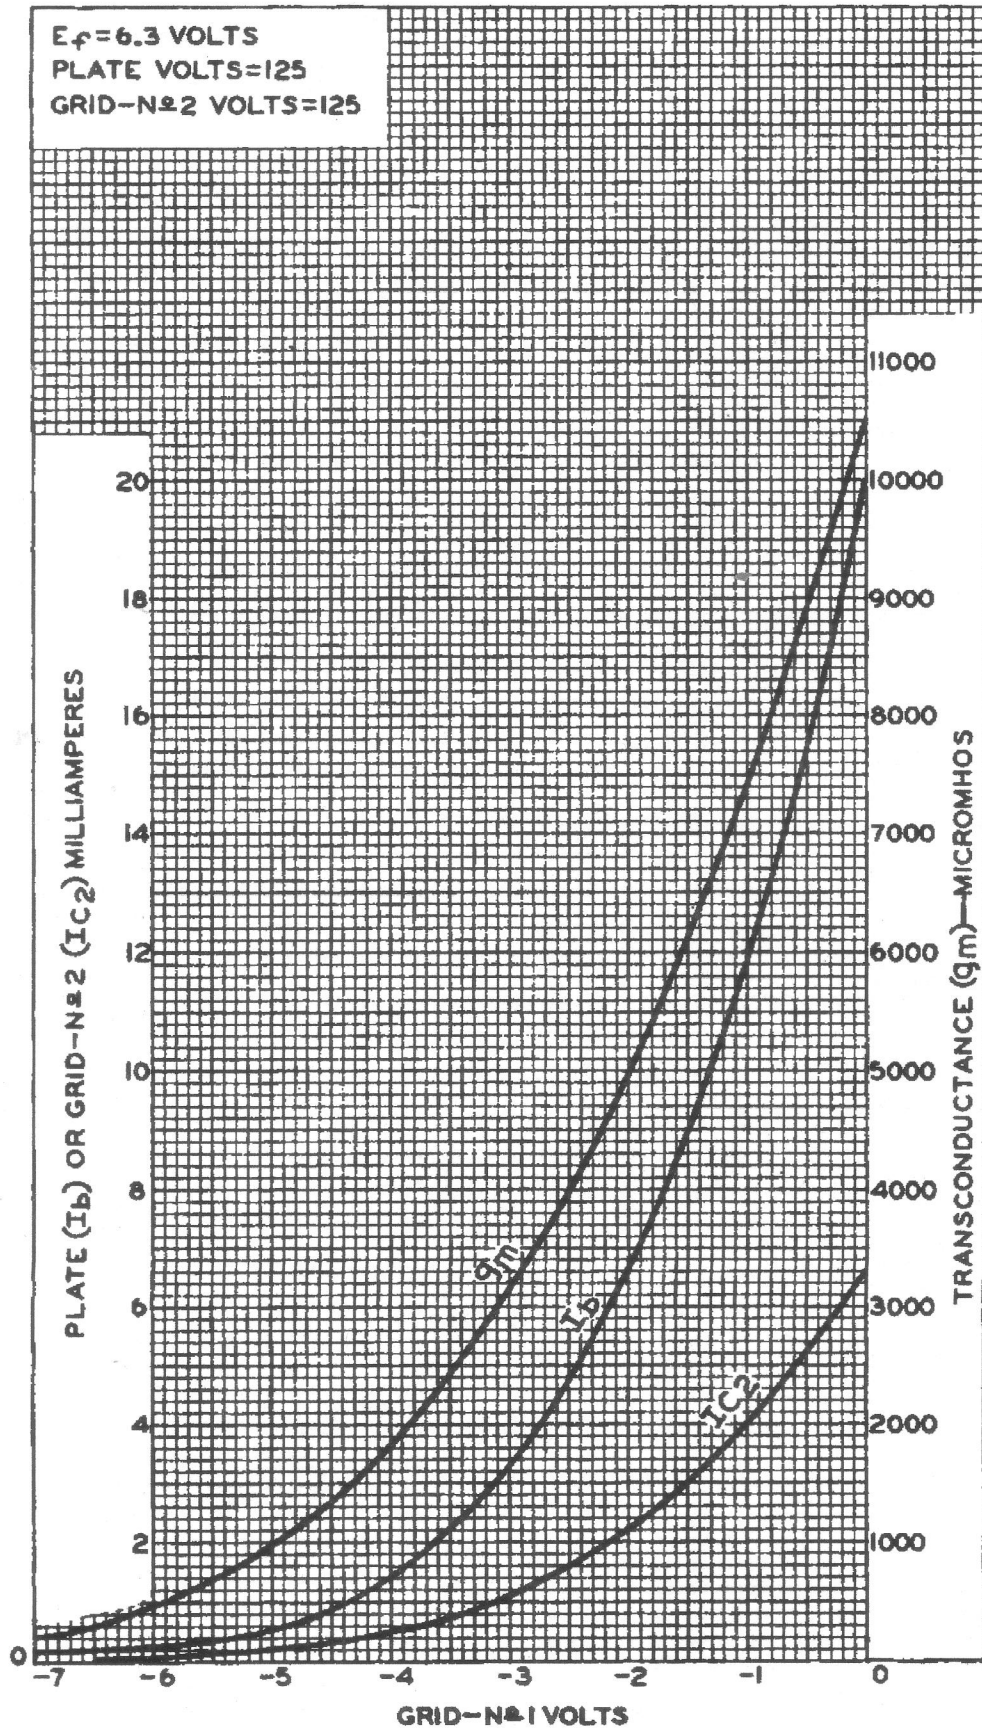

92CM-10417



AVERAGE CHARACTERISTICS Pentode Unit

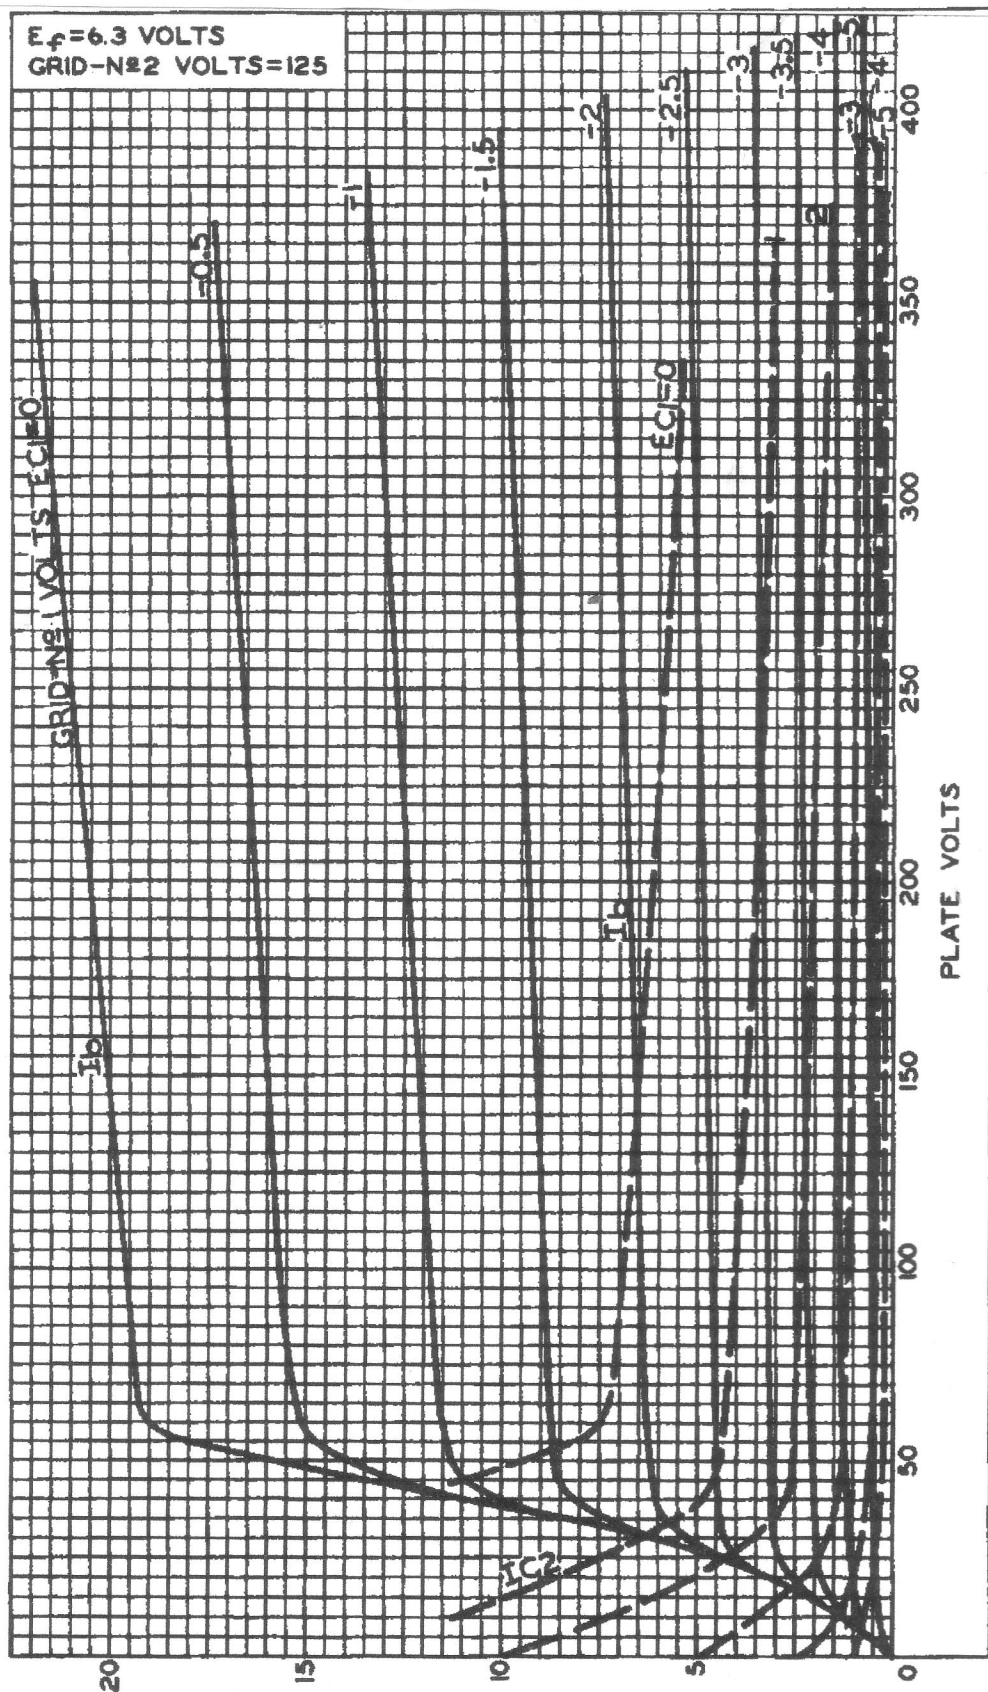


PLATE (I_b) OR GRID-N#2 (I_{C2}) MILLIAMPERES

92CM-10436



RADIO CORPORATION OF AMERICA
Electronic Components and Devices
Harrison, N. J.

DATA 3
3-64

AVERAGE CHARACTERISTICS Pentode Unit

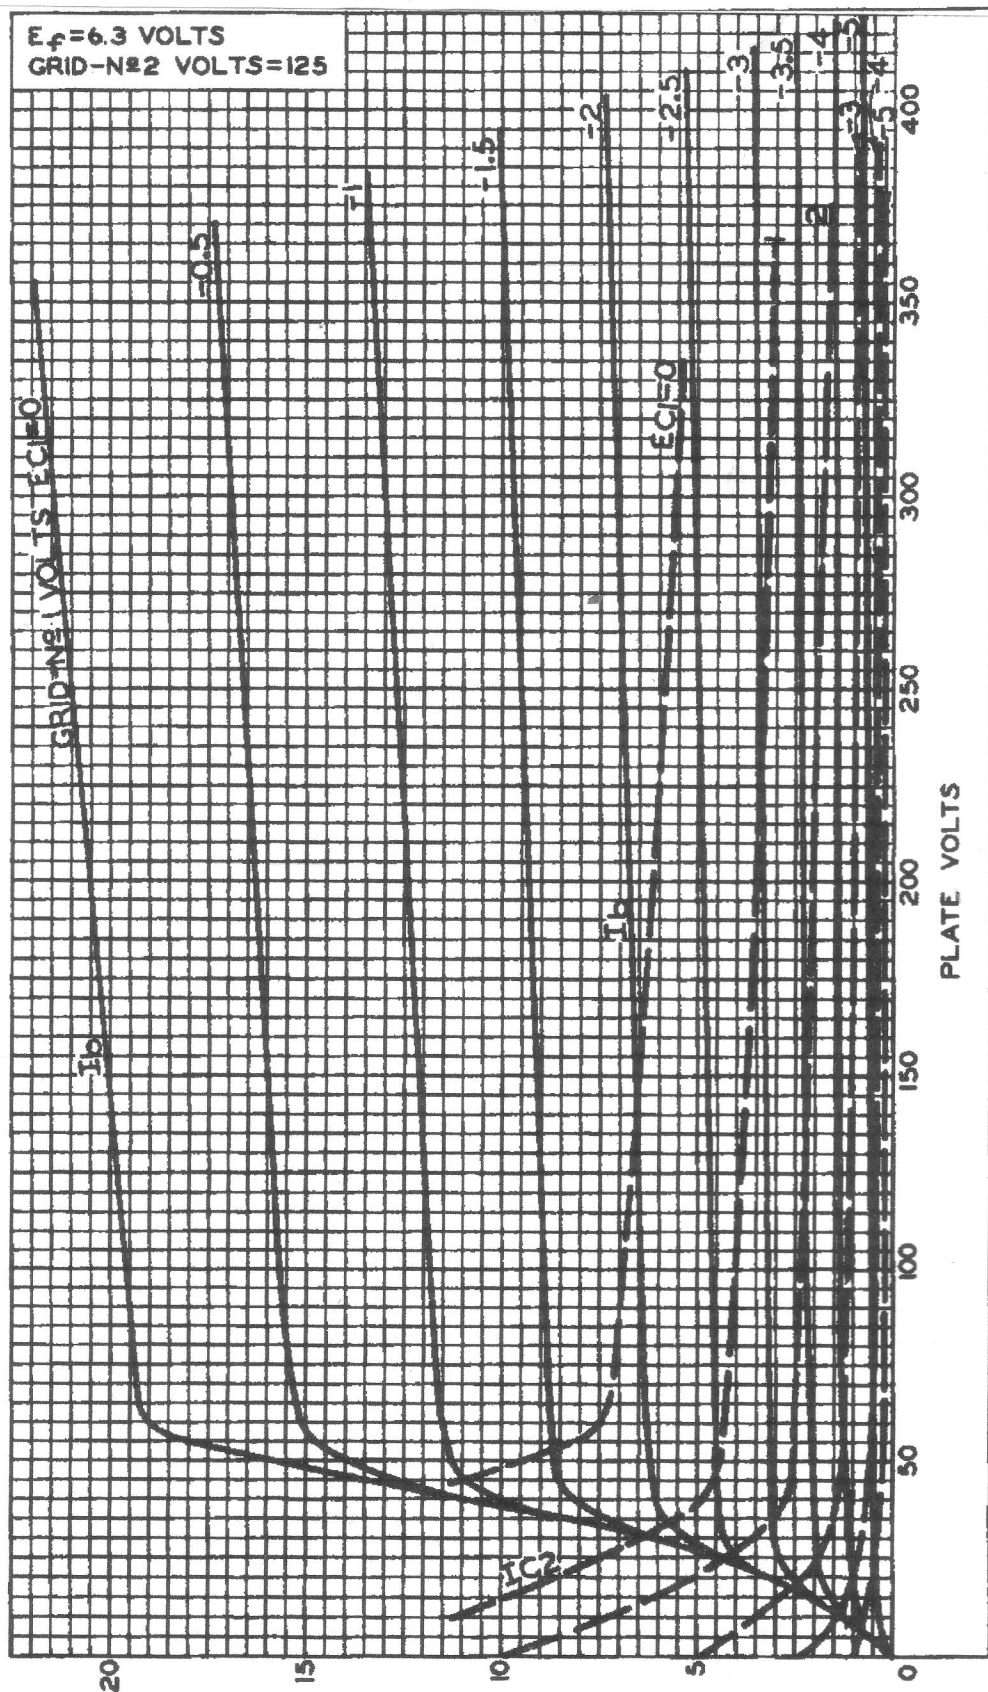


PLATE (I_b) OR GRID-N#2 (I_{C2}) MILLIAMPERES

92CM-10436



RADIO CORPORATION OF AMERICA
Electronic Components and Devices
Harrison, N. J.

DATA 3
3-64