




# MARCONI A.C. MAINS VALVES

## MPT 4, Pentode, 25/-

Marconi MPT.4 is a new high efficiency indirectly heated pentode giving a large output with a comparatively small input to the grid. It is an ideal output valve for three or four valve receivers having only one low frequency stage, and will operate moving coil or medium impedance moving iron speakers equally well.

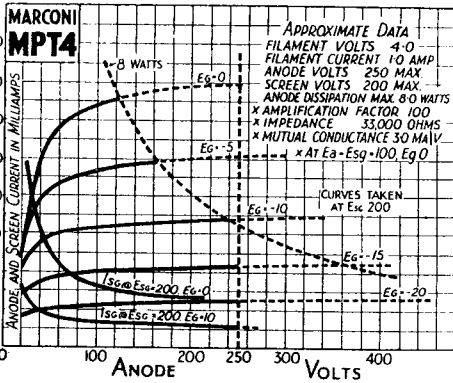

Approximate Operating Data.

Anode Volts.	Screen Volts.	Grid Bias.	Anode Current.	Screen Current.
250	200	-10.5	32 m.a.	5.5 m.a.

## PT 4, Pentode, 25/-

Marconi PT.4 is a medium size directly heated pentode having slightly less output than MPT.4, and recommended where an indirectly heated valve cannot be used.

Approximate Operating Data.

Anode Volts.	Screen Volts.	Grid Bias.	Anode Current.	Screen Current.
200	200	-18	30 m.a.	7.5 m.a.

