

Same as 6AS7-G/GA except for dimensions and shock/fatigue ratings. Same as 6082 except for filament voltage/current.



6080

6080

LOW-MU TWIN POWER TRIODE

GENERAL DATA

Heater, for Unipotential Cathodes:

Voltage	6.3 ± 10%	ac or dc	volts
Current	2.5		amp

Direct Interelectrode Capacitances (Approx.):

(Each Unit, without external shield)

Grid to Plate	8	μf
Input	6	μf
Output	2.2	μf

Heater to Cathode:

Triode Unit No.1	6.5	μf
Triode Unit No.2	6	μf
Grid of Unit No.1 to Grid of Unit No.2	0.5	μf
Plate of Unit No.1 to Plate of Unit No.2	2	μf

Characteristics, Amplifier Class A₁ (Each Unit):


Plate-Supply Voltage	135	volts
Cathode-Bias Resistor	250	ohms
Amplification Factor	2	
Plate Resistance	280	ohms
Transconductance	7000	μmhos
Plate Current	125	ma

Mechanical:

Mounting Position	Any
Maximum Overall Length	4-1/16" ←
Maximum Seated Length	3-1/2" ←
Maximum Diameter	1-23/32"
Bulb	T-12
Base	Large-Wafer Octal 8-Pin with Sleeve and External Barriers (JETEC No. B8-98) ←

Basing Designation for BOTTOM VIEW 8BD

Pin 1 - Grid of Unit No.2
 Pin 2 - Plate of Unit No.2
 Pin 3 - Cathode of Unit No.2
 Pin 4 - Grid of Unit No.1

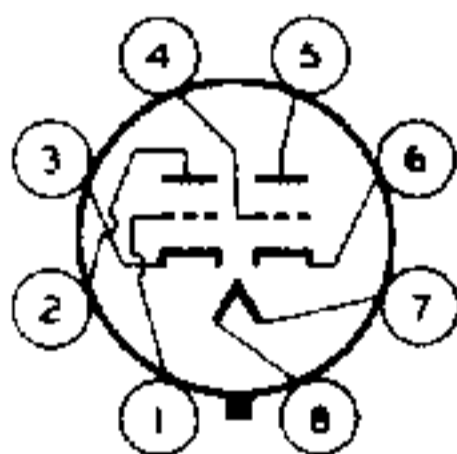

Pin 5 - Plate of Unit No.1
 Pin 6 - Cathode of Unit No.1
 Pin 7 - Heater
 Pin 8 - Heater

DC AMPLIFIER

Values are for Each Unit

Maximum Ratings, Absolute Values:

PLATE VOLTAGE	250 max.	volts
PLATE CURRENT	125 max.	ma
PLATE DISSIPATION	13 max.	watts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode	300 max.	volts
Heater positive with respect to cathode	300 max.	volts

← Indicates a change

6080



6080

LOW-MU TWIN POWER TRIODE

BULB TEMPERATURE[⊙] 200 max. °C

Maximum Circuit Values:

Grid-Circuit Resistance:

For cathode-bias operation 1.0 max. megohm
 For fixed-bias operation[□] 0.1 max. megohm
 For combined fixed and cathode-bias operation^{*} 0.1 max. megohm

BOOSTER SCANNING SERVICE

Values are for Each Unit

Maximum Ratings, Absolute Values:

For operation in a 525-line, 30-frame system[▲]

PEAK NEGATIVE-PULSE PLATE VOLTAGE[⊙] 3000 max. volts
 PEAK NEGATIVE-PULSE GRID VOLTAGE 2300 max. volts
 DC PLATE CURRENT 125 max. ma
 PLATE DISSIPATION 13 max. watts
 PEAK HEATER-CATHODE VOLTAGE:
 Heater negative with respect to cathode[⊙] 300 max. volts
 Heater positive with respect to cathode. 300 max. volts
 BULB TEMPERATURE[⊙] 200 max. °C

Maximum Circuit Values (For maximum rated conditions):

Grid-Circuit Resistance:

For cathode-bias operation 1.0 max. megohm
 For fixed-bias operation not recommended

CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

	Note	Min.	Max.	
Heater Current	1	2.26	2.74	amp
Amplification Factor				
(Each Unit)	1,2	1.4	2.6	
Plate Current (Each Unit).	1,2	100	150	ma
Transconductance				
(Each Unit)	1,2	5800	8200	μmhos
Reverse Grid Current				
(Units in Parallel)	1,3	-	4	μamp

Note 1: With 6.3 volts ac or dc on heater.
 Note 2: With plate-supply voltage of 135 volts, and cathode-bias resistor of 250 ohms in each cathode (both triode units operating).
 Note 3: With plate-supply voltage of 135 volts, grid resistor of 1 megohm in each grid and cathode-bias resistor of 250 ohms in each cathode (both triode units operating).

⊙ At hottest point on bulb surface.
 □ When fixed bias is used, the plate circuit should contain a protective resistance to provide a minimum drop of 15 volts dc at the normal operating conditions.

*, ▲, ●, ⊙: See next page. → Indicates a change



6080

6080

LOW-MU TWIN POWER TRIODE

- ★ when combined fixed- and cathode-bias is used, the cathode-bias portion should have a minimum value of 7.5 volts dc at the normal operating conditions.
- ▲ As described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations", Federal Communications Commission.
- The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.
- Operation of this tube is not recommended with a damper pulse between heater and cathode.

SPECIAL RATINGS & PERFORMANCE DATA

Shock Rating:


Impact Acceleration 450 max. g
 Tubes are held rigid in four different positions in a Navy Type, High Impact (flyweight) Shock Machine and are subjected to 450 g impact acceleration.

Fatigue Rating:

Vibrational Acceleration 2.5 max. g
 Tubes are rigidly mounted and subjected in each of three positions to 2.5 g vibrational acceleration at 25 cycles per second for 32 hours.

Low-Frequency Vibration Performance:

RMS Output Voltage 200 max. mv
 Under the following conditions and with units connected in parallel: Heater voltage of 6.3 volts, plate voltage supply of 135 volts, dc grid voltage of -7 volts, plate load resistance of 2000 ohms, and vibrational acceleration of 2.5 g at 25 cycles per second.

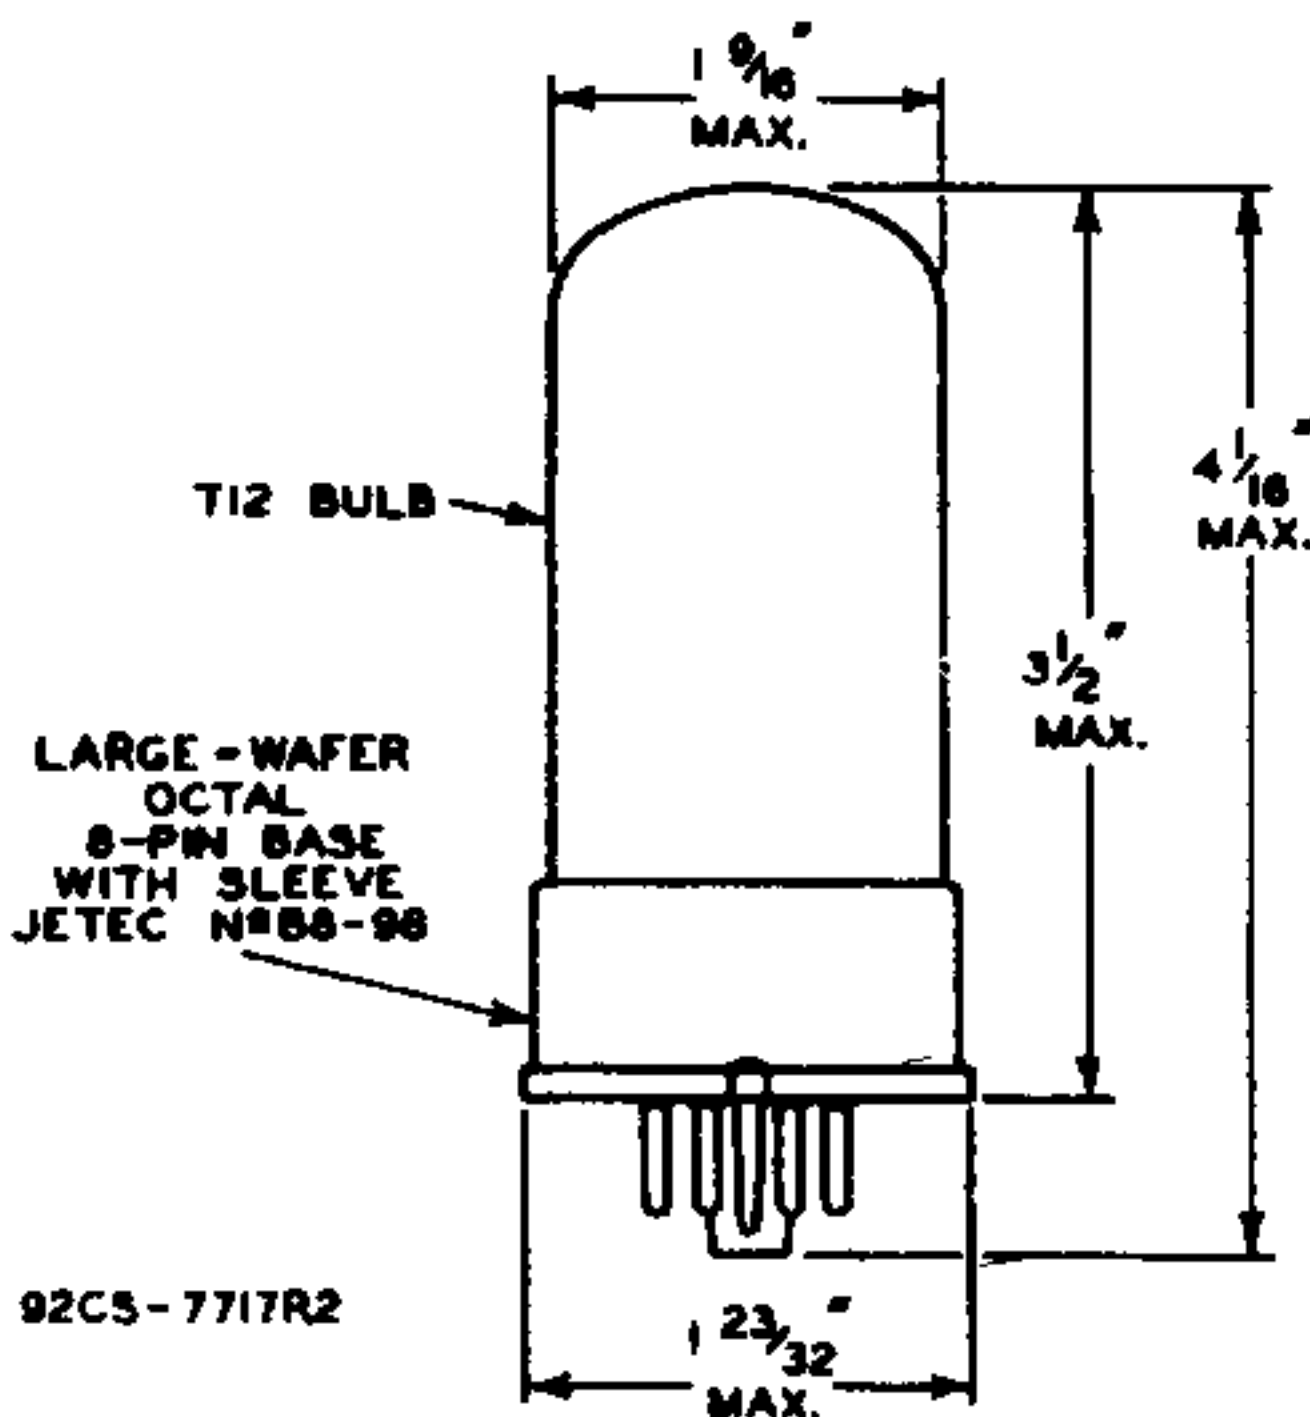


← indicates a change

6080



6080

AVERAGE PLATE CHARACTERISTICS EACH TRIODE UNIT

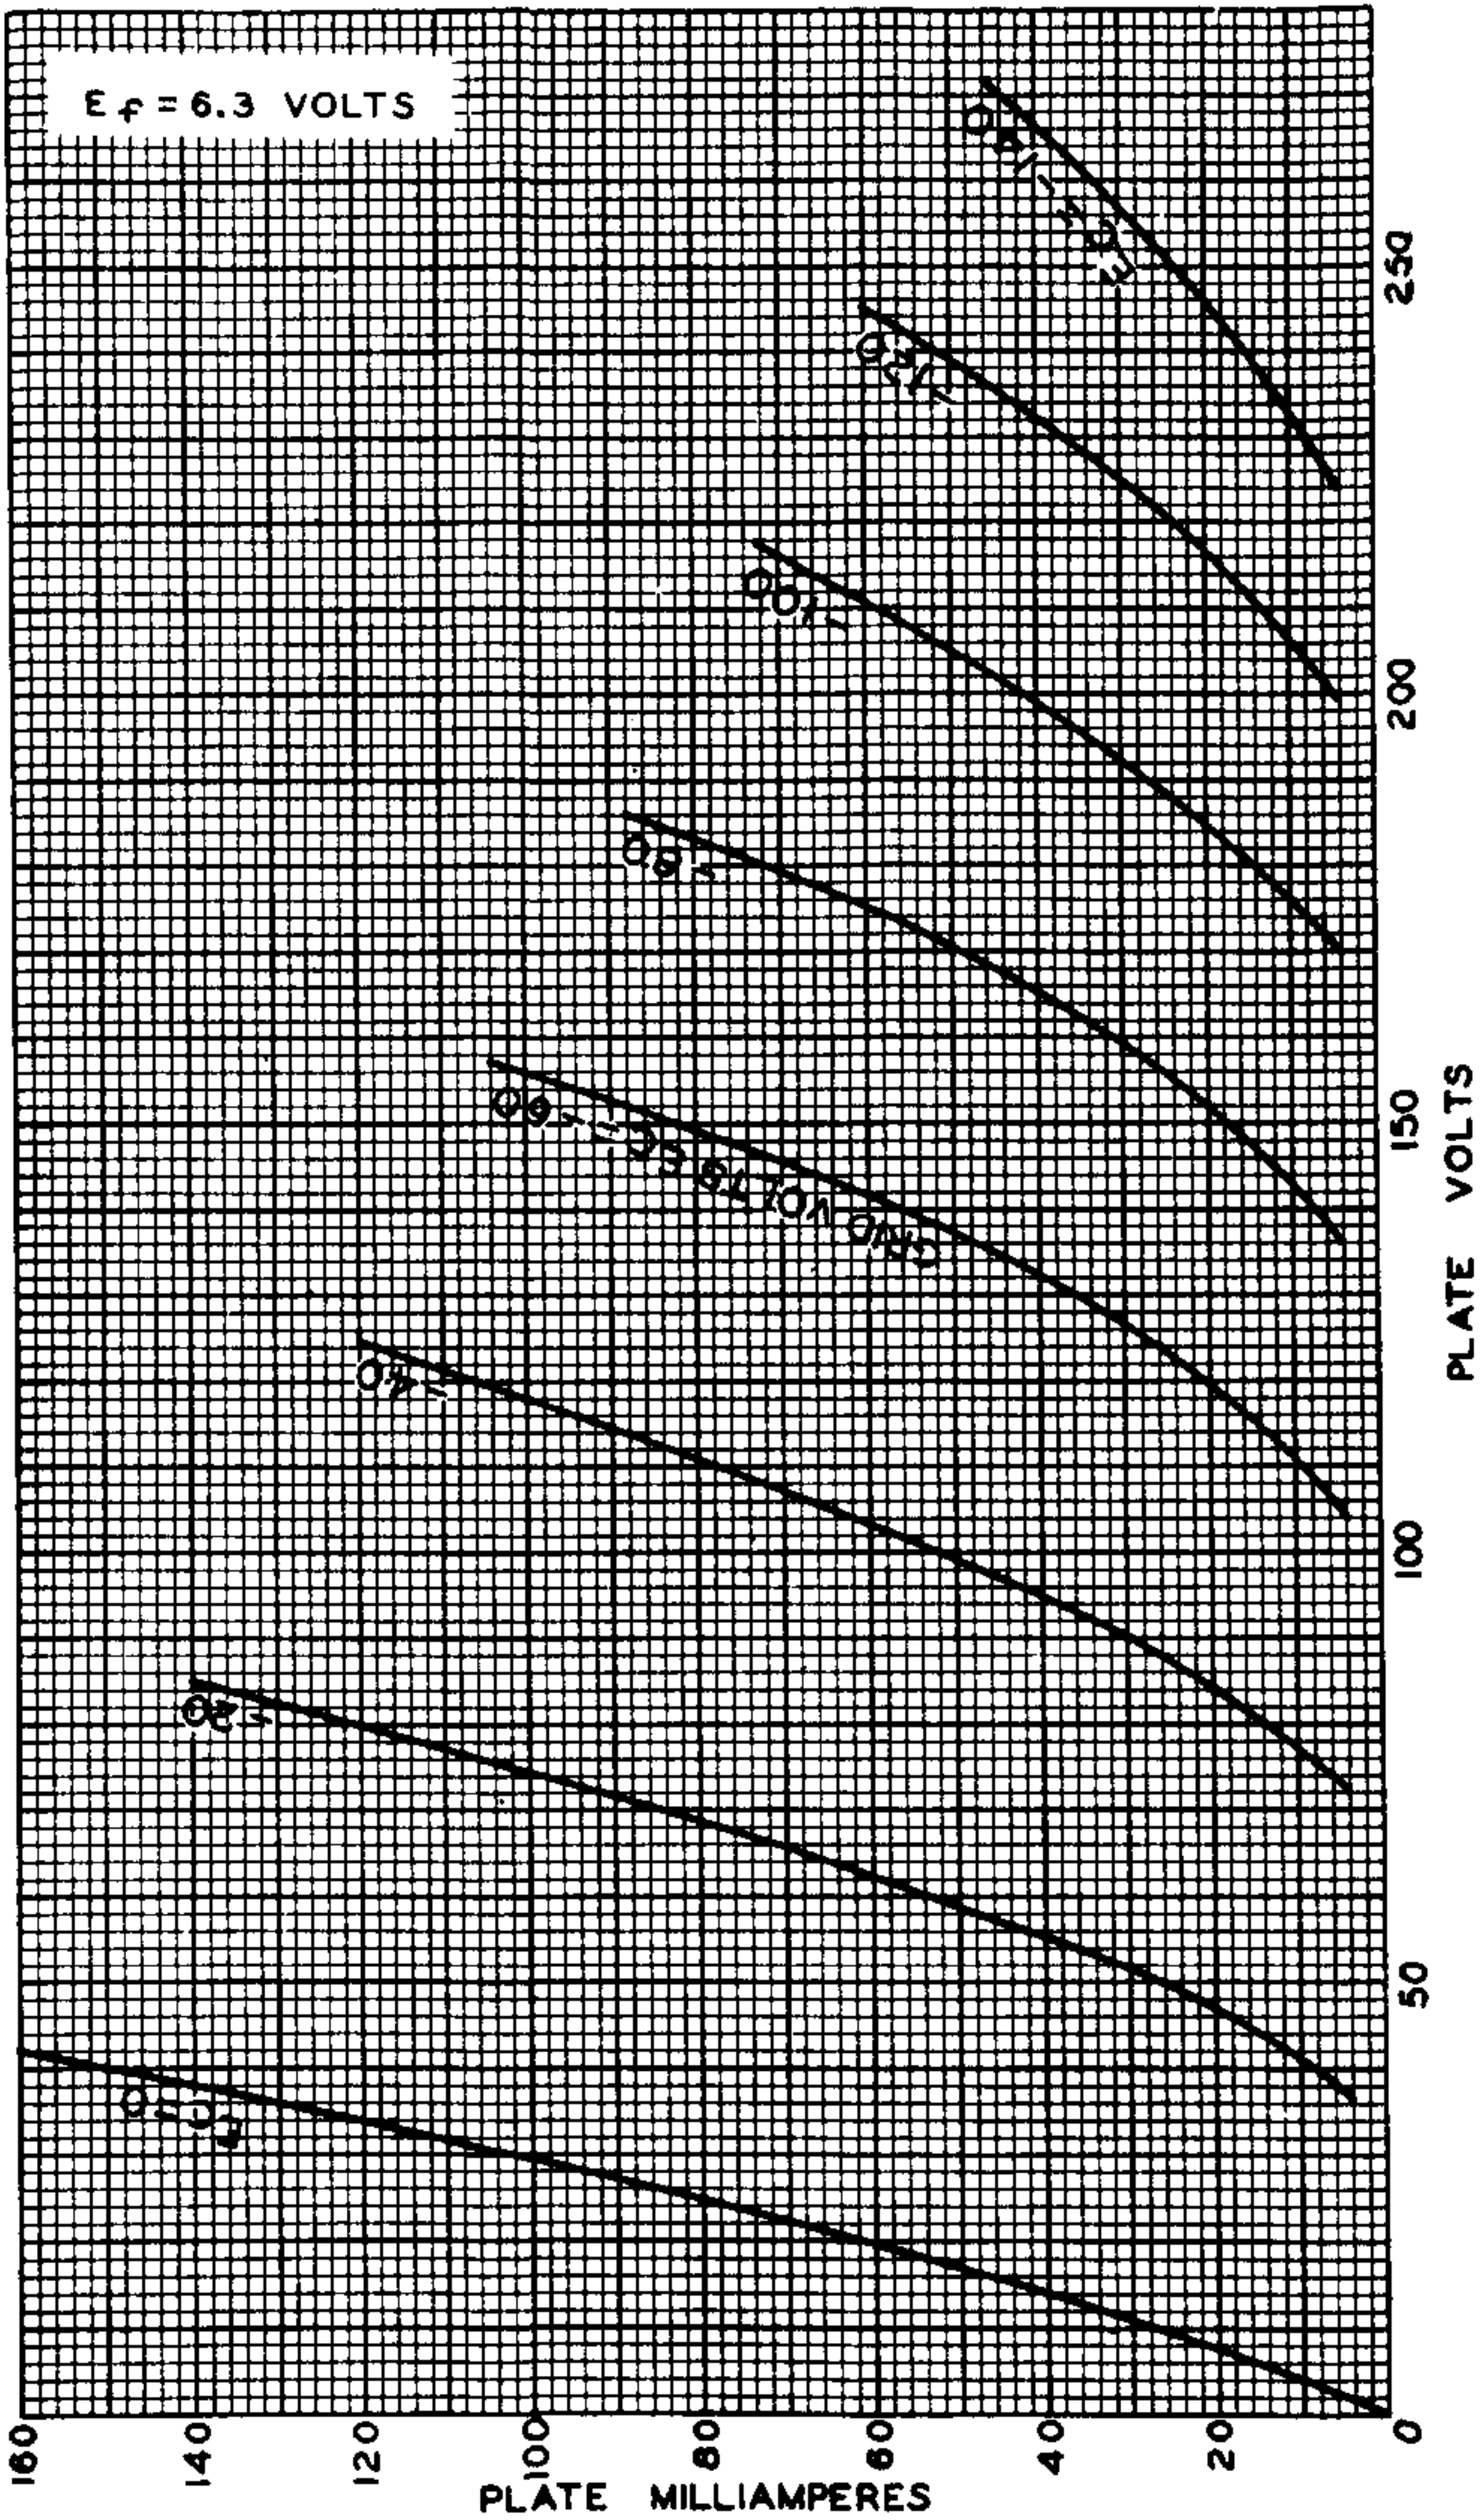

OCT. 19, 1951

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-7695