



TUNG-SOL

DOUBLE-DIODE TRIODE
MINIATURE TYPE

GLASS BULB
MINIATURE BUTTON
7 PIN BASE E7-1
OUTLINE DRAWING
JEDEC 5-2

COATED UNIPOTENTIAL CATHODE
VOLTAGE AMPLIFIER
AND
DETECTOR

ANY MOUNTING POSITION



BOTTOM VIEW
BASING DIAGRAM
JEDEC 78T

THE 6BF6 IS A COMBINED LOW-MU VOLTAGE AMPLIFIER AND DOUBLE DIODE DETECTOR USING THE 7 PIN MINIATURE CONSTRUCTION. THE LOW AMPLIFICATION FACTOR OF THE TRIODE PERMITS LARGE VALUES OF OUTPUT SIGNAL WITH LOW DISTORTION.

DIRECT INTERELECTRODE CAPACITANCES

	WITHOUT SHIELD	WITH ^A SHIELD	
TRIODE SECTION:			
GRID TO PLATE: (G TO TP)	1.9	1.9	pf
INPUT: G TO (H+K)	1.8	1.9	pf
OUTPUT: TP TO (H+K)	0.7	1.2	pf
DIODE SECTION:			
#1 DIODE PLATE TO GRID: (1DP TO G) MAX.	0.07	0.06	pf
#2 DIODE PLATE TO GRID: (2DP TO G) MAX.	0.06	0.05	pf
#2 DIODE PLATE TO HEATER AND CATHODE	0.95		pf
#1 DIODE PLATE TO HEATER AND CATHODE	0.66		pf

HEATER CHARACTERISTICS AND RATINGS

DESIGN MAXIMUM VALUES - SEE EIA STANDARD RS-239

AVERAGE CHARACTERISTICS	6.3 VOLTS	300	MA.
HEATER SUPPLY LIMITS:			
VOLTAGE OPERATION		6.3±0.6	VOLTS
CURRENT OPERATION		300±20	MA.
MAXIMUM PEAK HEATER-CATHODE VOLTAGE:			
HEATER NEGATIVE WITH RESPECT TO CATHODE		90	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE		90	VOLTS

^A EXTERNAL SHIELD 316 CONNECTED TO PIN#2.

→ INDICATES A CHANGE.

CONTINUED ON FOLLOWING PAGE

TUNG-SOL

CONTINUED FROM PRECEDING PAGE


MAXIMUM RATINGS



DESIGN CENTER VALUES - SEE EIA STANDARD RS-239

PLATE VOLTAGE	300	VOLTS
PLATE DISSIPATION	2.5	WATTS
AVERAGE DIODE CURRENT EACH UNIT FOR CONTINUOUS OPERATION	1.0	MA.

TYPICAL OPERATING CHARACTERISTICS
CLASS A_1 AMPLIFIER

PLATE VOLTAGE	250	VOLTS
GRID VOLTAGE	-9	VOLTS
PLATE RESISTANCE	8500	OHMS
TRANSCONDUCTANCE	1900	μ MHOS
AMPLIFICATION FACTOR	16	
PLATE CURRENT	9.5	MA.
LOAD RESISTANCE	10000	OHMS
TOTAL HARMONIC DISTORTION	6.5	PERCENT
POWER OUTPUT	300	MW.
DIODE CURRENT EACH PLATE WITH 10 VOLTS DC APPLIED (MIN.)	0.8	MA.

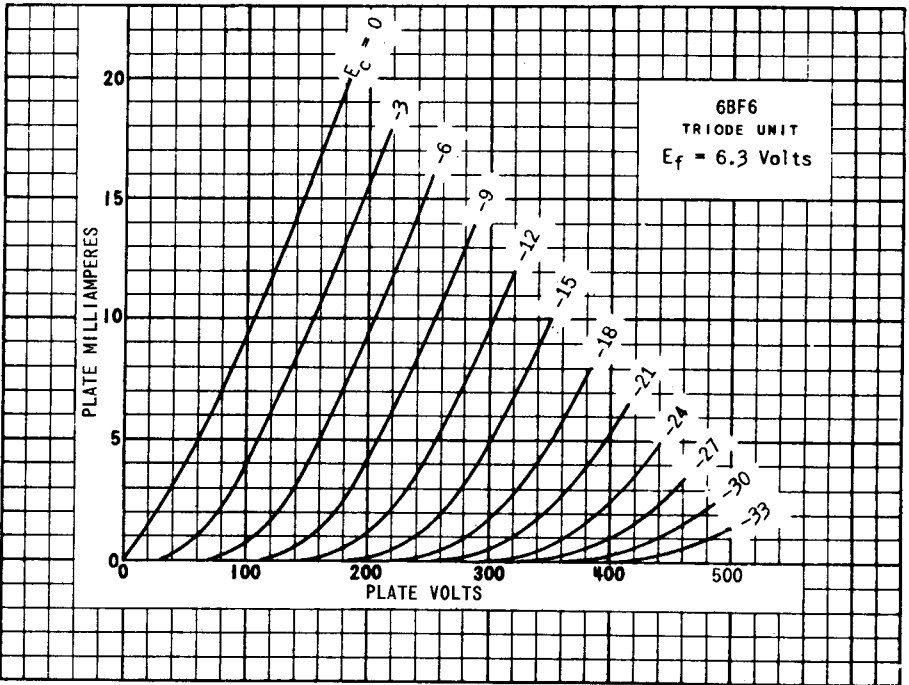

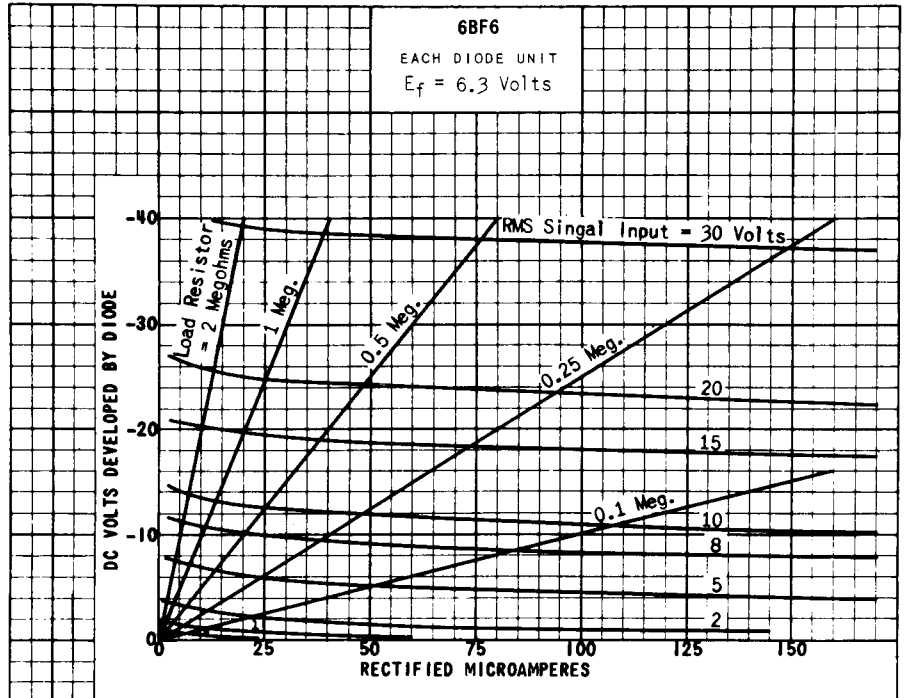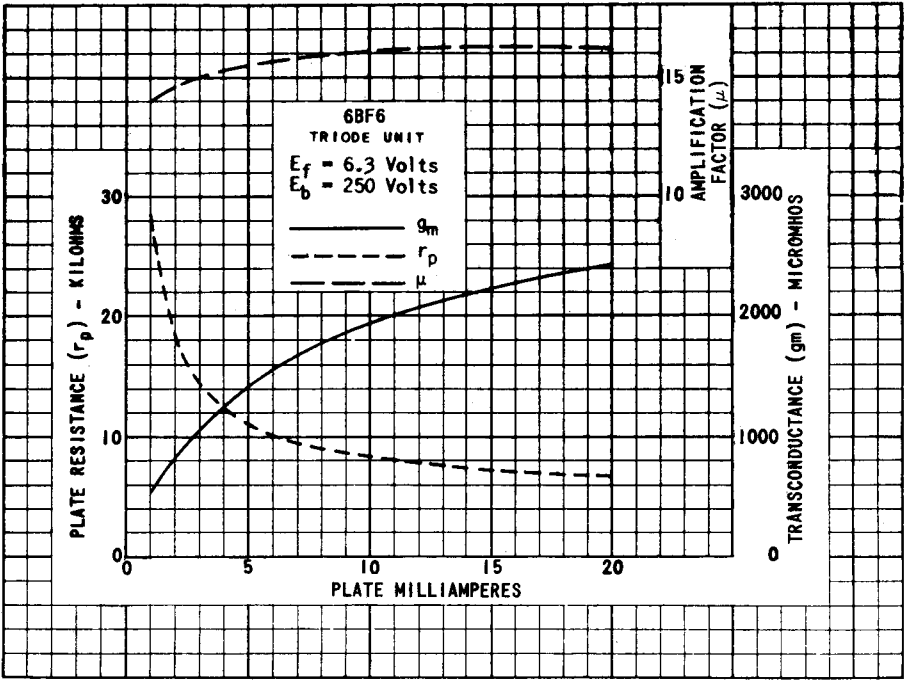

PRINTED IN U. S. A.